



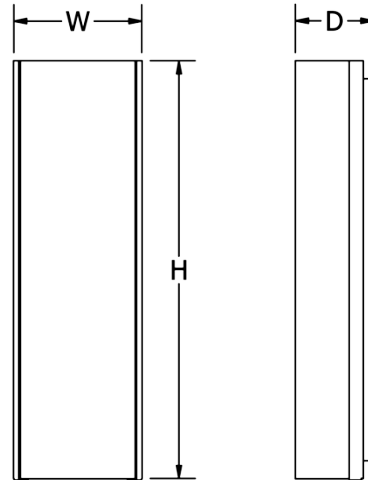

GL-4635

TUCSON



GENERAL SPECIFICATION

Lamping: Standard lamping packages offer long lamp life, high power factor energy efficient electronic ballast.

Diffuser: Standard perforated white top and bottom diffuser.

Acrylic: UL-94 HB Flame Class rated.

Standard Finish: Highly durable oven cured no VOC premium powder coat.

Custom: Contact factory for custom lengths and lamping.

SAMPLE CATALOG NUMBER:					
GL-4634-		A-	W-	NSN-	A
MODEL NO.		LAMPING	ACRYLIC	FINISH	OPTION(S)
GL-4634	W in 5 3/4" mm 145 H in 13 1/4" mm 335 D in 4" mm 100 5lbs 2.3kg	A. 1CF18 B. LED	Standard: W. White Opal Optional: S. Satin White F. Faux Alabaster M. Earth Marble H. Hand Painted Alabaster G. Grass cast Resin K. Leaf Cast Resin 3N. Weave Cast Resin Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat Specify code from G-Lighting color chart.	A. No Options B. Emergency CF Remote mount up to 5' from lamps. Compact Fluorescent only. B1. Emergency T5 Remote mount up to 5' from lamps. T5 lamps only. B2. Emergency LED Consult factory. D. Integral Dimming Specify voltage. See dimming chart.
GL-4635	W in 5 3/4" mm 145 H in 19" mm 480 D in 4" mm 100 6lbs 2.7kg	C. 1CF39 B. LED			
GL-4636	W in 5 3/4" mm 145 H in 24" mm 610 D in 4" mm 100 7lbs 3.2kg	E. 1T524HO G. 2LED			

All dimensions are nominal.

Lamp Definition

Lamp	Fluorescent	Lamp Base	Rated Life Hrs ¹	Lumens ¹	Lamp	LED	Kelvin ²	CRI	Rated Life Hrs	Lumens
CF18	CF 18W	2G11 4PIN	20000	1250	LED	13W Strip	4000	80	50000	1510
CF39	CF39W	2G11 4PIN	12000	2510	2LED	(2) 13W Strips	4000	80	50000	3020
T524HO	T5 24W	Mini-Bi-Pin	36000	1840						

¹Per GE lamp products catalog

²Additional Kelvin temperatures available. Contact factory.