




BASILONE

Indoor LED Pendant

GLighting
Since 1908

9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
Fax 314.631.7800

sales@glighting.com www.glighting.com

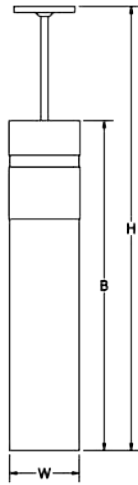

GENERAL SPECIFICATION

Canopy: Low profile. May be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord hung.



Body: .050 spun aluminum cap. Black perforated decorative ring. Driver integral.

Acrylic: Seamless acrylic cylinder is UL-94 HB Flame Class rated. Standard bottom diffuser.

Modifications: Consult factory for lamping or cluster options.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Cable Hanger: Supplied with standard 72" white cord and cable. Field adjustable.

SAMPLE CATALOG NUMBER: GL-6000-						
MODEL NO.	A-	W-	NSN-	1-	A-	038
	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT
GL-6000 W in 6" mm 150 12lbs 7.4kg B in 28 1/2" mm 725 H in 38" mm 965	A. LED24	Standard: W White Opal S Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat Premium: SA Satin Aluminum Specify code from G-Lighting color chart	1. Stem 	A. No Options D. Dimming EL. Remote LED Emergency Remote mount up to 25' from lamps. Hanger option 1 only. ELC. LED Emergency Mounted in 12" x 2 1/2" canopy. Hanger option 1 only.	Stem mount only - Specify overall height in inches. Standard overall height shown by model no.
GL-6001 W in 6" mm 150 20lbs 9kg B in 40 1/2" mm 1030 H in 50" mm 1270	A. LED24			2. Cable 		
GL-6002 W in 6" mm 150 30lbs 11.3kg B in 57" mm 1448 H in 68" mm 1702	A. LED24			Standard White Power Cord		

Fixtures over 50 lbs require reinforced junction box

Lamp Definition

Lamp	LED	Rated Life Hrs	Delivered Lumens	Kelvin	CRI
LED24	1 24W LED	50000	1166	3000	80