

BEAM


Exterior Sconce

GLighting
Since 1908
 9777 Reavis Park Drive
 St. Louis, MO 63123
 800.331.2425 or 314.631.6000
 Fax 314.631.7800

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** 0-10V dimming standard with LED lamping option.
- Lamping:** Standard lamping packages offer long lamp life, high power factor energy efficient electronic ballast.
- Body:** Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
- Acrylic:** Extruded lens is UL-94 HB Flame Class rated.
- Standard Finishes:** Highly durable oven cured no VOC premium powder coat.
- Design:** Aluminum die cast end caps and decorative bars.
- Modified:** Contact factory for modified lengths, lamping and decorative fronts.
- Exterior Mounting:** Gasketed between wall and wall plate.

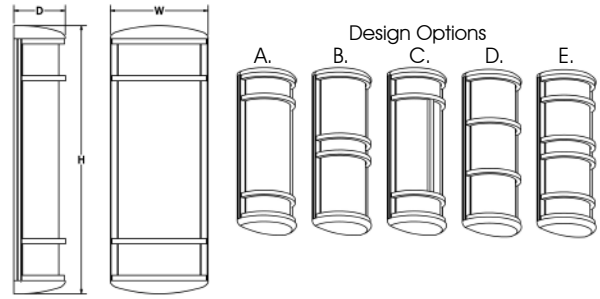

SAMPLE CATALOG NUMBER:						
GL-5451-	C-	W-	SN-	A-	A	
MODEL NO.	LAMPING	ACRYLIC	FINISH	DESIGN	OPTION(S)	
GL-5450 5lbs 2.3kg	W in 7 1/4" mm 185 H in 17" mm 430 D in 3 7/8" mm 125	A. 14LED30 B. 14LED35 C. 14LED40	Standard: W. White Opal Optional: S. Satin White	Standard: Powder Coat Specify code from G-Lighting color chart. Premium: SA - Satin Aluminum	Standard: A. Optional: B. C. D. E. Not available with GL-5450	A. No Options D. Integral Dimming Specify voltage. See dimming chart. Dimming standard with LED lamping. E. Emergency Remote mount up to 5' from lamps in controlled environment with an area temperature range of 32°- 131°F. Compact fluorescent only. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F.
GL-5451 7lbs 3.2kg	W in 7 1/4" mm 185 H in 25" mm 635 D in 3 7/8" mm 125	D. 14LED30 E. 14LED35 F. 14LED40 G. 28LED30 H. 28LED35 I. 28LED40 J. 1T524HO	Acrylic is UL-94 HB Flame Class rated.			
GL-5452 10lbs 4.5kg	W in 7 1/4" mm 185 H in 37" mm 940 D in 3 7/8" mm 125	K. 21LED30 L. 21LED35 M. 21LED40 N. 42LED30 O. 42LED35 P. 42LED40 Q. 1T539HO				
GL-5453 14lbs 6.3kg	W in 7 1/4" mm 185 H in 49" mm 1245 D in 3 7/8" mm 125	R. 28LED30 S. 28LED35 T. 28LED40 U. 56LED30 V. 56LED35 W. 56LED40 X. 1T554HO				

All dimensions are nominal.

Lamp Definition

Lamp	Fluorescent	Lamp Base	Rated Life Hrs	Lumens	Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
T524HO	T5HO 24W	Mini Bi-Pin	36000	1840	28LED30	28W	80	50000	1562	3000
T539HO	T5HO 39W	Mini Bi-Pin	36000	3500	28LED35	28W	80	50000	1562	3500
T554HO	T5HO 54W	Mini Bi-Pin	36000	4600	28LED40	28W	80	50000	1562	4000
			Rated	Delivered	42LED30	42W	80	50000	2527	3000
			Life Hrs	Lumens	42LED35	42W	80	50000	2527	3500
			Life Hrs	Lumens	42LED40	42W	80	50000	2527	4000
			Life Hrs	Lumens	56LED30	56W	80	50000	3124	3000
			Life Hrs	Lumens	56LED35	56W	80	50000	3124	3500
			Life Hrs	Lumens	56LED40	56W	80	50000	3124	4000
14LED30	14W	80	50000	781	3000					
14LED35	14W	80	50000	781	3500					
14LED40	14W	80	50000	781	4000					
21LED30	21W	80	50000	1171	3000					
21LED35	21W	80	50000	1171	3500					
21LED40	21W	80	50000	1171	4000					