




GL-2501

HARTWELL



### Cluster Sample

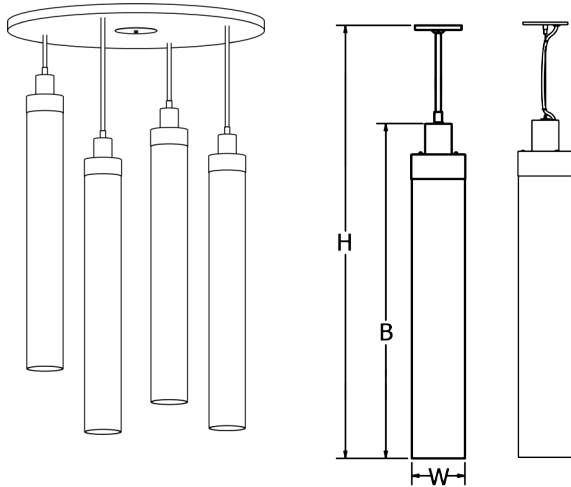

### GENERAL SPECIFICATION

**Canopy:** Low profile. May be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord hung.

**Ballast:** T5 energy efficient integral electronic ballast. Universal voltage.

**GU24:** Instant start self-ballasted lamp. 120v only.

**Lamping:** GU24 base socket accepts any style or wattage GU24 lamp. GU24 fluorescent lamp supplied with GL-2500. T5 or T5HO offer high efficiency and long life.



**Body:** .050 spun aluminum cap.

**Acrylic:** Seamless acrylic cylinder is UL-94 HB Flame Class rated.

**Modifications:** Consult factory for lamping or cluster options.

**Standard Finishes:** Highly durable oven cured no VOC premium powder coat.

**Cable Hanger:** Supplied with standard 72" white cord and cable. Field adjustable.

SAMPLE CATALOG NUMBER:							
GL-2500-		B-	W-	NSN-	1-	A-	O40
MODEL NO.		LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT
GL-2500	W in 6" mm 150 15lbs B in 29" mm 735 6.8kg H in 40" mm 1005	A. 1GU25DIM* B. 1GU26* C. 1GU32* D. 1GU42* E. 1PAR3075* K. RGB	Standard: W White Opal S Satin White  Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat  Premium: SA Satin Aluminum	1. Stem 	A. No Options E. Emergency Remote mount up to 5' from lamps. Hanger option 1 only.  Emergency option only available in T5 lamps.	Standard overall height shown by model no.  For custom overall height, specify in inches.
GL-2501	W in 6" mm 150 20lbs B in 34" mm 865 9kg H in 45" mm 1145	E. 1PAR3075* F. 2T524HO K. RGB		Specify code from G-Lighting color chart.	2. Cable 	D. Dimming DALI digital dimming available. See dimming chart.	
GL-2502	W in 6" mm 150 40lbs B in 59" mm 1500 18.2kg H in 70" mm 1780	G. 2T528 H. 2T554HO I. 2T528DL* J. 2T554HODL* K. RGB			Standard White Power Cord		

Fixtures over 50 lbs require reinforced junction box.  
All dimensions are nominal. \*Available in 120V only.

### Lamp Definition

Lamp	Fluorescent	Lamp Base	Incandescent Equivalent <sup>1</sup>	Rated Life Hrs <sup>1</sup>	Rated Lumens <sup>1</sup>	Rated Kelvin	Lamp	Halogen	Lamp Base	Rated Life Hrs <sup>1</sup>	Rated Lumens <sup>1</sup>	
GU25DIM <sup>2,3</sup>	GU24 25W	GU24	75W	10000	1200	2700	PAR3075	1 PAR30 75W	Medium	3000	1030	
GU26	GU24 26W	GU24	100W	10000	1650	2700	DL <sup>4</sup>	1 PAR30 75W	Medium	3000	1030	
GU32	GU24 32W	GU24	120W	10000	2200	2700	<b>LED</b>					
GU42	GU24 42W	GU24	150W	10000	2730	2700	RGB	Contact Factory for Details				
T524HO	T5 24W	Mini-Bi-Pin		36000 <sup>5</sup>	1840	3500						
T528	T5 28W	Mini Bi-Pin		36000 <sup>5</sup>	2530	3500						
T554HO	T5 54W	Mini Bi-Pin		36000 <sup>5</sup>	4600	3500						

<sup>1</sup>Per MAXLITE & GE lamp products catalog  
<sup>2</sup>Continuous dimming down to 30%.

<sup>3</sup>Works with incandescent dimming controls.  
<sup>4</sup>Downlights are wired on separate circuit.

<sup>5</sup>12HR start