

HELIO

Outer Acrylic Interior Pendant

GLighting
Since 1908

9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
Fax 314.631.7800

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.



LED Dimming: 0-10V dimming standard.

Acrylic: Satin white seamless outer acrylic is UL-94 HB Flame Class rated.


Cable Hanger: Comes with 72" cable and cord for on-site adjustability. Canopy painted textured white.

Finish: Highly durable oven cured no VOC premium powder coat. Fixture painted textured white.

RGB: DMX controller supplied by others.

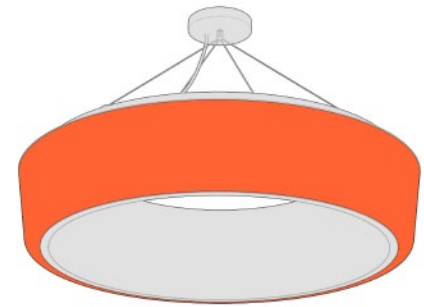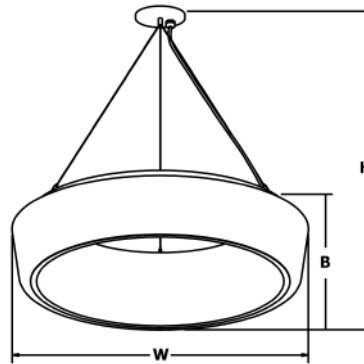

RGB LED Lamping Option

SAMPLE CATALOG NUMBER: GL-2651-		B-	1-	A
MODEL NO.		LAMPING	HANGER	OPTIONS
GL-2650	W in 26" mm 660 20lbs B in 8 1/2" mm 215 9kg H in 20"-68" mm 510-1730 Fixture Painted Textured White	M. 4LED30 F. 4LED35 N. 4LED40 K. RGB	1. Cable 	A. No Options EL. Emergency Ballast Integrally operates two LED strips. Integral test switch. Specify voltage after code. Available GL-2651-2652 only.
GL-2651	W in 37 1/2" mm 950 30lbs B in 8 1/2" mm 215 13.5kg H in 20"-68" mm 510-1730 Fixture Painted Textured White	C. 6LED30 B. 6LED35 E. 6LED40 D. RGB		
GL-2652	W in 52" mm 1320 40lbs B in 8 1/2" mm 215 18kg H in 20"-68" mm 510-1730 Fixture Painted Textured White	I. 10LED30 J. 10LED35 R. 10LED40 L. RGB		

All Dimensions are nominal.

Lamp Code Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code
4LED30	56	+80	50000	3837	3000	RGB - Contact Factory for Details
4LED35	56	+80	50000	3837	3500	
4LED40	56	+80	50000	3837	4000	
6LED30	85	+80	50000	6374	3000	
6LED35	85	+80	50000	6374	3500	
6LED40	85	+80	50000	6374	4000	
10LED30	141	+80	50000	10840	3000	
10LED35	141	+80	50000	10840	3500	
10LED40	141	+80	50000	10840	4000	