



GL-2680

SIDNEY 10"




SIDNEY 10"

Indoor Pendant

GLighting
Since 1908

9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
Fax 314.631.7800

sales@glighting.com www.glighting.com

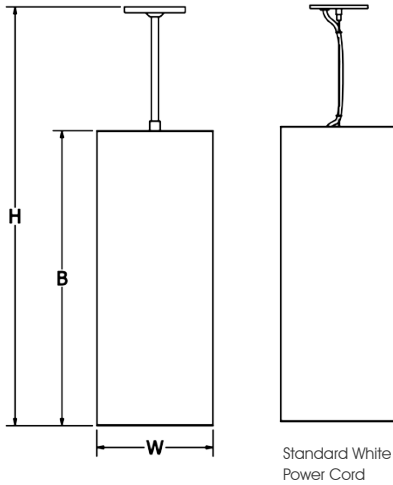

GENERAL SPECIFICATION

Canopy: Low profile. May be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord hung.

Ballast: T5 energy efficient integral electronic ballast. Universal voltage.



Lamping: T5 or T5HO offer high efficiency and long life.

Body: Seamless acrylic cylinder is UL-94 HB Flame Class rated. End caps painted white.

Modifications: Consult factory for lamping or cluster options.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Cable Hanger: Supplied with standard 72" white cord and cable. Field adjustable.

SAMPLE CATALOG NUMBER:							
GL-2680-		A-	W-	NSN-	1-	A- 038	
MODEL NO.		LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT
GL-2680	W in 10" mm 255 B in 28" mm 710 H in 38" mm 965 15lbs 7kg	A. 2T524HO G. 4T524HO	Standard: W White Opal S Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat Premium: SA Satin Aluminum	1. Stem 	A. No Options D. Dimming See dimming chart. Hanger option 1 only. E. Emergency Operates one fluorescent lamp. Remote up to 5ft. Hanger option 1 only. Specify voltage after code.	Stem mount only - Specify overall height in inches. Standard overall height shown by model no.
GL-2681	W in 10" mm 255 B in 32 1/4" mm 820 H in 42" mm 1065 15lbs 7kg	B. 2T524HODL* H. 4T524HODL* DL two circuit only		Specify code from G-Lighting color chart.	2. Cable 		
GL-2682	W in 10" mm 255 B in 51 3/4" mm 1315 H in 62" mm 1575 30lbs 13.5kg	C. 2T528 D. 2T554HO I. 4T528 J. 4T554HO			Standard White Power Cord		
GL-2683	W in 10" mm 255 B in 55 7/8" mm 1420 H in 66" mm 1675 30lbs 13.5kg	E. 2T528DL* F. 2T554HODL K. 4T528DL* L. 4T554HODL DL two circuit only					

Fixtures over 50 lbs require reinforced junction box
All dimensions are nominal. *Available in 120V only.

Lamp Definition

Lamp	Fluorescent	Lamp Base	Rated Life Hrs ^{1,3}	Lumens ¹	Kelvin	Lamp	Halogen	Lamp Base	Rated Life Hrs ¹	Lumens ¹
T524HO	T5HO 24W	Mini Bi-Pin	36000	1840	3500	DL ²	1 PAR30 75W	Medium	3000	1030
T528	T5 28W	Mini Bi-Pin	36000	2530	3500					
T554HO	T5HO 54W	Mini Bi-Pin	36000	4600	3500					

¹Per MAXLITE & GE lamp products catalog

²Downlights are wired on separate circuit. ³12HR start