


BEAM - QUICKSHIP

Exterior Sconce

GLighting
Since 1908

9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
Fax 314.631.7800


sales@glighting.com www.glighting.com

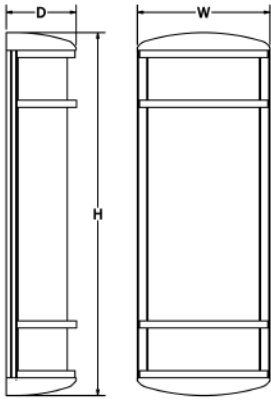

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.
LED Dimming: 0-10V dimming standard with LED lamping option.
Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
Acrylic: Extruded lens is UL-94 HB Flame Class rated.
Finish: Highly durable oven cured no VOC premium powder coat. Fixture painted dark bronze.
Design: Aluminum die cast end caps and decorative bars.
Exterior Mounting: Gasketed between wall and wall plate.



SAMPLE CATALOG NUMBER: GL-5450-					
MODEL NO.	B-	W-	DBZ-	A-	A
	LAMPING	ACRYLIC	FINISH	DESIGN	OPTION(S)
GL-5450 W in 7 1/4" mm 185 H in 17" mm 430 5lbs 2.3kg D in 3 7/8" mm 125	B. 14LED35	Standard: W. White Opal	Standard: DBZ - Dark Bronze	Standard: A. 	A. No Options

All dimensions are nominal.

Lamp Definition

Code	Lamp	Total Wattage	Delivered Lumens	Kelvin
B	14LED35	14W	781	3500