




Fluorescent and LED
GL-4300

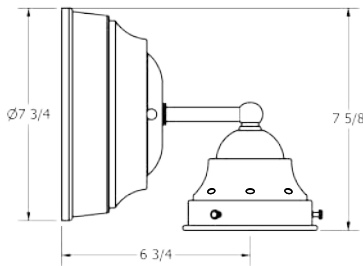

Medium Base
GL-4301

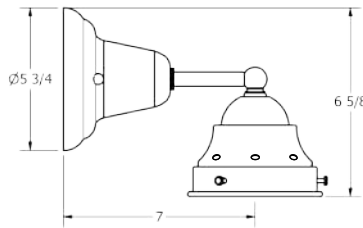

Editor Glass

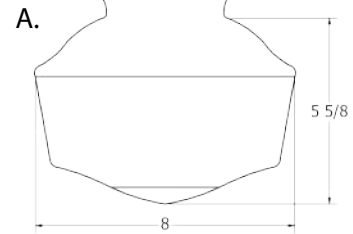

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: 0-10V dimming standard with LED lamping option.

Body: 18ga steel or .050 aluminum glass fitter.

Glass: White opal diffuser hand blown in the USA.

Finish: Highly durable oven cured no VOC premium powder coat.

SAMPLE CATALOG NUMBER: GL-4300-				
MODEL NO.	C-	A-	SN-	A-
	LAMPING	GLASS	FINISH	OPTION(S)
GL-4300	A. 1CFQ13 B. 1CFQ18 C. 1CFQ26 D. 1CFT32 L. LED11 Driver and ballast in backplate	A. Editor Glass	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze Premium: SB-Satin Brass PB-Polished Brass AB-Antique Brass ORB-Oil Rubbed Bronze PC-Polished Copper SA-Satin Aluminum SC-Satin Chrome SN-Satin Nickel	A. No Options B. Damp Location Available in powder coat or Satin Aluminum finish. DE. ECO Dimming Lutron Ecosystem dimming CF lamping option. Specify voltage and wattage after dimming code. DV. Mark VII Dimming Advance Mark VII dimming CF lamping option. Specify voltage and wattage after dimming code. DX. Mark X Dimming Advance Mark X dimming CF lamping option. Specify voltage and wattage after dimming code. E. Emergency Ballast Operates one fluorescent lamp. Remote mount up to 5' from lamps in controlled environment with an area temperature range of 32°-131°F. Non-dimming compact fluorescent only. Specify 120 or 277 voltage. EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-4301	IN1. 1MED 120 volt only			

All dimensions are nominal.

Lamp Definition

Code	Fluorescent	Lamp Base	Rated Life Hrs ¹	Lumens ¹
CFQ13	CFQ 13W	G24q-1 4PIN	12000	755
CFQ18	CFQ 18W	G24q-2 4PIN	12000	1010
CFQ26	CFQ 26W	GX24q-3 4PIN	12000	1440
CFT32	CFTR 32W	GX24q-3 4PIN	12000	1850
	LED	Kelvin		
LED11	11W LED	3500	50000	1460

¹Per MAXLITE & GE lamp products catalog

Contact factory for availability of other lamp configurations including LED.