

GENERAL SPECIFICATION


LED: High efficiency mid-power LEDs are field serviceable. Universal voltage.


Acrylic: Satin white acrylic is UL-94 HB Flame Class rated.

Cable Hung: Comes with 72" cable and white cord for on-site adjustability.

Finish: Highly durable oven cured no VOC premium powder coat. Fixture painted textured white. Canopy painted textured white.

Dimming: 0-10V dimming standard.

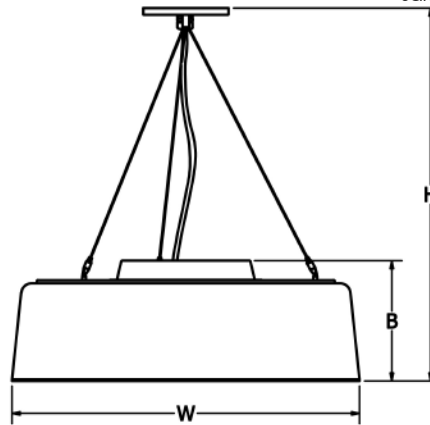

SAMPLE CATALOG NUMBER: GL-2635-		A-	1-	A
MODEL NO.		LAMPING	HANGER	OPTIONS
GL-2635	W in 26" mm 660 10lbs B in 8" mm 205 4.5kg H in 20"-68" mm 510-1730 Fixture Painted White	A. 5LED30 B. 5LED35 C. 5LED40	1. Cable 	A. No Options LC. 150" Cord & Cable Fixture supplied with 150" of cable and standard white cord. EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-2636	W in 37 1/2" mm 950 15lbs B in 8" mm 205 6.8kg H in 20"-68" mm 510-1730 Fixture Painted White	D. 8LED30 E. 8LED35 F. 8LED40		

All Dimensions are nominal.

Lamp Code Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
5LED30	71	+80	50000	7047	3000
5LED35	71	+80	50000	7047	3500
5LED40	71	+80	50000	7047	4000
8LED30	113	+80	50000	11802	3000
8LED35	113	+80	50000	11802	3500
8LED40	113	+80	50000	11802	4000