


# OCULUS

## Interior Pendant

G Lighting  
Since 1908

9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000  
Fax 314.631.7800

sales@glighting.com www.glighting.com

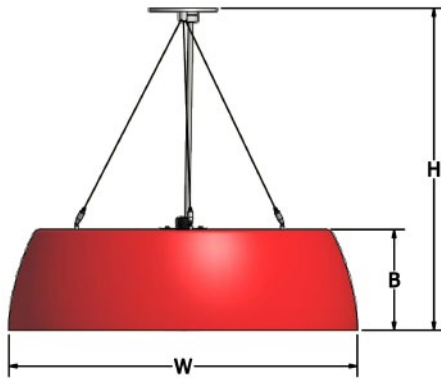

### GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs are field serviceable. Universal voltage.


**Acrylic:** Satin white seamless outer acrylic is UL-94 HB Flame Class rated.

**Cable Hung:** Comes with 72" cable and white cord for on-site adjustability.

**Finish:** Highly durable oven cured no VOC premium powder coat. Spinning interior painted white. Canopy painted textured white.

**Dimming:** 0-10V dimming standard.



SAMPLE CATALOG NUMBER: GL-2641-		E-	PTC-	1-	A
MODEL NO.		LAMPING	FINISH	HANGER	OPTIONS
GL-2640	W in 26" mm 660 10lbs B in 7 1/2" mm 190 4.5kg H in 20"-68" mm 510-1730	A. 4LED30 B. 4LED35 C. 4LED40	Standard: Powder Coat Specify code from G-Lighting color chart  Premium: SA - Satin Aluminum	1. Cable 	A. No Options BC. Black Cord Fixture supplied with black power cord. LC. 150" Cord & Cable Fixture supplied with 150" of cable and standard white cord or optional black cord. EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-2641	W in 37" mm 940 15lbs B in 7 1/2" mm 190 6.8kg H in 20"-68" mm 510-1730	D. 5LED30 E. 5LED35 F. 5LED40			

All Dimensions are nominal.

### Lamp Code Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
4LED30	57	+80	50000	4310	3000
4LED35	57	+80	50000	4310	3500
4LED40	57	+80	50000	4310	4000
5LED30	72	+80	50000	5320	3000
5LED35	72	+80	50000	5320	3500
5LED40	72	+80	50000	5320	4000