

OCULUS

Interior Surface Mount

G Lighting
Since 1908

9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
Fax 314.631.7800

sales@glighting.com www.glighting.com


GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable. Universal voltage.

Acrylic: Satin white acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat. Spinning interior painted white.

Dimming: 0-10V dimming standard.

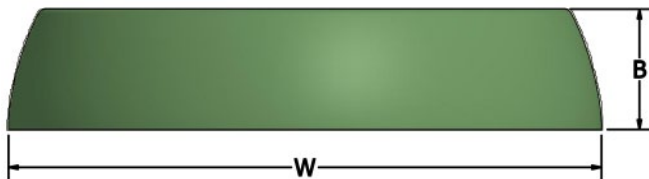

SAMPLE CATALOG NUMBER: GL-3641-				E-	NSN-	A
MODEL NO.				LAMPING	FINISH	OPTIONS
GL-3640	W in 26"	mm 660	8lbs 3.5kg	A. 4LED30 B. 4LED35 C. 4LED40	Standard: Powder Coat Specify code from G-Lighting color chart Premium: SA - Satin Aluminum	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-3641	W in 37"	mm 940	10lbs 4.5kg	D. 5LED30 E. 5LED35 F. 5LED40		

All Dimensions are nominal.

Lamp Code Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
4LED30	57	+80	50000	4310	3000
4LED35	57	+80	50000	4310	3500
4LED40	57	+80	50000	4310	4000
5LED30	72	+80	50000	5320	3000
5LED35	72	+80	50000	5320	3500
5LED40	72	+80	50000	5320	4000