SQUARE BEAM

Exterior Sconce

G|Lighting Since 1908
9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
Fax 314.631.7800
sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.
LED Dimming: 0-10V dimming standard.
Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.
Standard Finishes: Highly durable oven cured no VOC premium powder coat.
Design: Aluminum die cast end caps and decorative bars.
Modified: Contact factory for modified lengths, lamping and decorative fronts.
Exterior Mounting: Gasketed between wall and wall plate.



Design Options

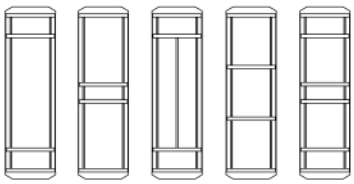

SAMPLE CATALOG NUMBER: GL-5471- H- S- PA- A- A

MODEL NO.	LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)
GL-5470 W in 7 1/4" mm 185 H in 17" mm 430 5lbs D in 3 7/8" mm 125 2.3kg	A. 14LED30 B. 14LED35 C. 14LED40	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat Specify code from G-Lighting color chart. Premium: SA - Satin Aluminum	Standard: A. Optional: B. C. D. E. Not available with GL-5470	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-5471 W in 7 1/4" mm 185 H in 25" mm 635 7lbs D in 3 7/8" mm 125 3.2kg	D. 14LED30 E. 14LED35 F. 14LED40 G. 28LED30 H. 28LED35 I. 28LED40				
GL-5472 W in 7 1/4" mm 185 H in 37" mm 940 10lbs D in 3 7/8" mm 125 4.5kg	K. 21LED30 L. 21LED35 M. 21LED40 N. 42LED30 O. 42LED35 P. 42LED40				
GL-5473 W in 7 1/4" mm 185 H in 49" mm 1245 14lbs D in 3 7/8" mm 125 6.3kg	R. 28LED30 S. 28LED35 T. 28LED40 U. 56LED30 V. 56LED35 W. 56LED40				

All dimensions are nominal.

Lamp Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
14LED30	14W	80	50000	1333	3000
14LED35	14W	80	50000	1333	3500
14LED40	14W	80	50000	1333	4000
21LED30	21W	80	50000	2095	3000
21LED35	21W	80	50000	2095	3500
21LED40	21W	80	50000	2095	4000

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
28LED30	28W	80	50000	2690	3000
28LED35	28W	80	50000	2690	3500
28LED40	28W	80	50000	2690	4000
42LED30	42W	80	50000	4191	3000
42LED35	42W	80	50000	4191	3500
42LED40	42W	80	50000	4191	4000
56LED30	56W	80	50000	5764	3000
56LED35	56W	80	50000	5764	3500
56LED40	56W	80	50000	5764	4000

© Gross Chandelier Co.

G Lighting reserves the right to modify existing designs to improve appearance or function

G Lighting products are union made.