

BATTEN

Indoor ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION



LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: 0-10V dimming standard. Integral driver.

Body: Formed 18ga steel or .050 aluminum body.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Custom: Contact factory for custom lamping, or sizing.

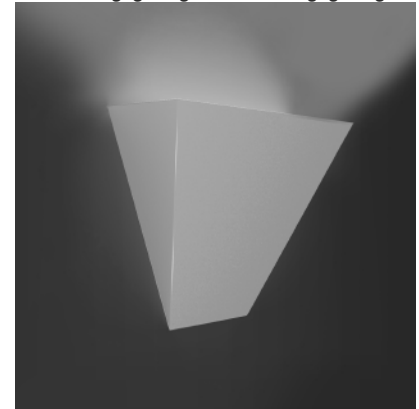

SAMPLE CATALOG NUMBER: GL-4505-					E5-	NSN-	A
MODEL NO.					LAMPING	FINISH	OPTION(S)
GL-4505	W in	14"	mm	355	B. 2CFQ13 C. 2CFQ18 D. 2CFQ26 E0. 1LED30 E5. 1LED35 E4. 1LED40	Standard: Powder Coat Specify code from G-Lighting color chart.	A. No Options B. Top White Perf E. Emergency Ballast Operates one fluorescent lamp. Remote mount up to 5' from lamps in controlled environment with an area temperature range of 32°- 131°F. Non-dimming compact fluorescent only. Specify 120 or 277 voltage. EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
	H in	10"	mm	255			
	D in	4"	mm	100			

All dimensions are nominal.

Light Source Definition

Lamp	Fluorescent	Lamp Base	Rated Life Hrs	Lumens	Code	LED	CRI	Rated Life Hrs	Kelvin	Board Lumens
CFQ13	CFQ 13W	GX24q-3 4-PIN	12000	900	1LED30	13W LED	+80	50000	3000	1895
CFQ18	CFQ 18W	GX24q-3 4-PIN	12000	1250	1LED35	13W LED	+80	50000	3500	1895
CFQ26	CFQ 26W	GX24q-3 4-PIN	12000	1440	1LED40	13W LED	+80	50000	4000	1895

