




BASILONE

Indoor LED Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

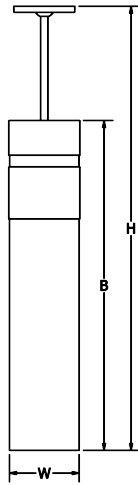

GENERAL SPECIFICATION

Canopy: Low profile. May be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord hung.

Body: .050 spun aluminum cap. Black perforated decorative ring. Driver integral.



Acrylic: Seamless acrylic cylinder is UL-94 HB Flame Class rated. Standard bottom diffuser.

Modifications: Consult factory for lamping or cluster options.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Cable Hanger: Supplied with standard 72" white cord and cable. Field adjustable.

LED Dimming: 0-10V dimming standard with LED lamping option.

SAMPLE CATALOG NUMBER: GL-6000-						
MODEL NO.	A-	W-	NSN-	1-	A-	038
	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT
GL-6000 W in 6" mm 150 B in 28 1/2" mm 725 H in 38" mm 965 12lbs 7.4kg	A. LED24	Standard: W White Opal S Satin White <small>Acrylic is UL-94 HB Flame Class rated.</small>	Standard: Powder Coat Premium: SA Satin Aluminum <small>Specify code from G-Lighting color chart</small>	1. Stem 	A. No Options EL. Remote LED Emergency <small>Remote mount up to 25' from lamps. Hanger option 1 only.</small> ELC. LED Emergency <small>Mounted in 12" x 2 1/2" canopy. Hanger option 1 only.</small> BC. Black Cord <small>Fixture supplied with black power cord. Hanger option 2 only.</small> LC. 150" Cord & Cable <small>Fixture supplied with 150" of cable and standard white cord or optional black cord. Hanger option 2 only.</small>	Stem mount only - Specify overall height in inches. <small>Standard overall height shown by model no.</small>
GL-6001 W in 6" mm 150 B in 40 1/2" mm 1030 H in 50" mm 1270 20lbs 9kg	A. LED24			2. Cable  Standard White Power Cord		
GL-6002 W in 6" mm 150 B in 57" mm 1448 H in 68" mm 1702 30lbs 11.3kg	A. LED24					

Fixtures over 50 lbs require reinforced junction box

Lamp Definition

Lamp	LED	Rated Life Hrs	Delivered Lumens	Kelvin	CRI
LED24	1 24W LED	50000	1166	3000	80