

GENERAL SPECIFICATION



LED: High efficiency mid-power LEDs are field serviceable.


LED Dimming: Standard 0-10V dimming. TRIAC, DALI, or DMX available upon request.

Acrylic: Satin white acrylic is UL-94 HB Flame Class rated. GL-2800 is one piece. GL-2801-2802 is two pieces.

Cable Hanger: Comes with 72" cable and white cord for on-site adjustability.

Finish: Highly durable oven cured no VOC premium powder coat. Fixture painted textured white.

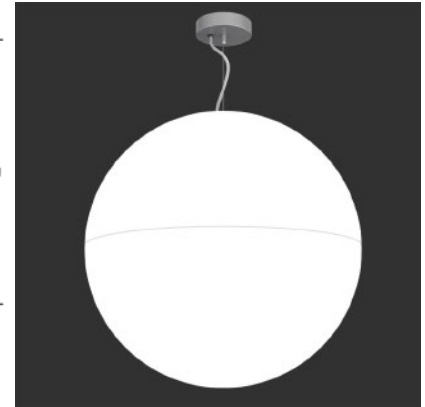

SAMPLE CATALOG NUMBER: GL-2801-		F-	1-	A
MODEL NO.		LAMPING	HANGER	OPTIONS
GL-2800	W in 18" mm 460 20lbs B in 18" mm 460 9kg H in 24"-84" mm 610-2135 Fixture Painted Textured White	A. 28LED30 B. 28LED35 C. 28LED40	1. Cable 	A. No Options LC. 150" Cord & Cable <small>Fixture supplied with 150" of cable and standard white cord or optional black cord.</small> EL. Emergency LED <small>Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.</small>
GL-2801	W in 24" mm 610 30lbs B in 24" mm 610 13.5kg H in 30"-90" mm 760-2285 Fixture Painted Textured White	E. 42LED30 F. 42LED35 G. 42LED40		
GL-2802	W in 30" mm 760 40lbs B in 30" mm 760 18kg H in 36"-96" mm 915-2440 Fixture Painted Textured White	I. 56LED30 J. 56LED35 K. 56LED40		

All Dimensions are nominal.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
28LED30	28	+80	50000	2844	3000	56LED30	56	+80	50000	6321	3000
28LED35	28	+80	50000	2844	3500	56LED35	56	+80	50000	6321	3500
28LED40	28	+80	50000	2844	4000	56LED40	56	+80	50000	6321	4000
42LED30	42	+80	50000	4912	3000	RGB	Contact Factory for Details				
42LED35	42	+80	50000	4912	3500						
42LED40	42	+80	50000	4912	4000						