

ORBIS II

Outer Acrylic Interior Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.

LED Dimming: 0-10V dimming standard.



Acrylic: Acrylic is UL-94 HB Flame Class rated.





Cable Hanger: Standard 150" cable and white cord for on-site adjustability. Canopy painted textured white.

Canopy: Max remote driver installation distance: White LED 25ft from fixture body and RGB 45ft from fixture body. See Orbis Hanger Guide for more information.

Finish: Highly durable oven cured no VOC premium powder coat.

RGB: DMX controller supplied by others.

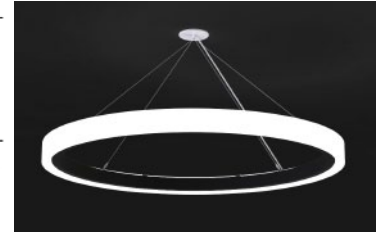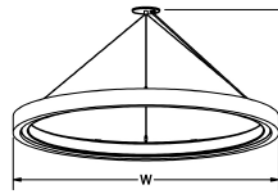

SAMPLE CATALOG NUMBER:		F-	BLK-	1-	A
GL-2726-		LAMPING	FINISH	HANGER	OPTIONS
GL-2725	W in 24" 10lbs B in 3" 4.5kg H in 11"-145"	A. 24LED30 B. 24LED35 C. 24LED40 D. RGB	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze	1. Cable - Standard  Drivers mounted remotely. See Orbis Hanger Guide for more information.	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-2738	W in 36" 12lbs B in 3" 5.4kg H in 18.75"-145"	U. 36LED30 V. 36LED35 W. 36LED40 X. RGB		2. Oversized  Drivers mounted inside oversized canopy. See Orbis Hanger Guide for more information.	BC. Black Cord Fixture supplied with black power cord.
GL-2726	W in 48" 15lbs B in 3" 6.8kg H in 18.75"-145"	E. 48LED30 F. 48LED35 G. 48LED40 H. RGB		3. Vertical Remote Canopy  Drivers mounted remotely. See Orbis Hanger Guide for more information.	
GL-2727	W in 72" 22lbs B in 3" 10kg H in 25.5"-142" Fixture Built with Four Acrylic Segments	I. 72LED30 J. 72LED35 K. 72LED40 L. RGB	Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze	4. Vertical Integral Canopy  Drivers mounted inside 12.5" oversized canopy. See Orbis Hanger Guide for more information.	
GL-2728	W in 96" 35lbs B in 3" 15.9kg H in 30.75"-139" Fixture Body Built in Four Segments and Eight Acrylic Segments.	M. 96LED30 N. 96LED35 O. 96LED40 P. RGB	Premium: SA-Satin Aluminum		
GL-2729	W in 120" 50lbs B in 3" 22.7kg H in 39"-133" Fixture Body Built in Three Segments and Eight Acrylic Segments	Q. 120LED30 R. 120LED35 S. 120LED40 T. RGB			

All Dimensions are nominal.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
24LED30	56	+80	50000	5141	3000	72LED30	160	+80	50000	15345	3000
24LED35	56	+80	50000	5141	3500	72LED35	160	+80	50000	15345	3500
24LED40	56	+80	50000	5141	4000	72LED40	160	+80	50000	15345	4000
36LED30	80	+80	50000	7684*	3000	96LED30	231	+80	50000	21594	3000
36LED35	80	+80	50000	7684*	3500	96LED35	231	+80	50000	21594	3500
36LED40	80	+80	50000	7684*	4000	96LED40	231	+80	50000	21594	4000
48LED30	112	+80	50000	10197	3000	120LED30	258	+80	50000	24301	3000
48LED35	112	+80	50000	10197	3500	120LED35	258	+80	50000	24301	3500
48LED40	112	+80	50000	10197	4000	120LED40	258	+80	50000	24301	4000

RGB Contact Factory for Details

*Pending IES Testing

