

# CUBIX

## Inner Acrylic Interior Pendant



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs are field serviceable.

**Lower Output:** Lamping code ending with LO features lower lumen output.

**LED Dimming:** 0-10V dimming standard.

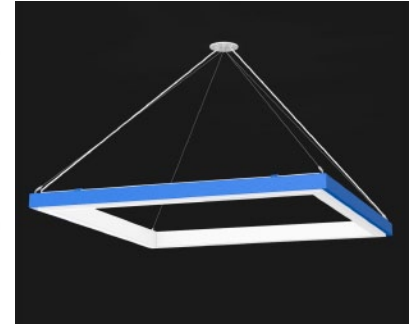
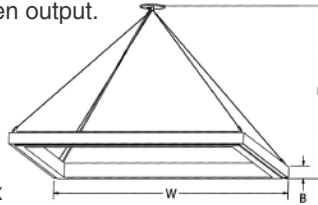
**Acrylic:** Acrylic is UL-94 HB Flame Class rated.





**Cable Hanger:** Standard 150" cable and white cord for on-site adjustability. Canopy painted textured white.

**Canopy:** Max remote driver installation distance: White LED 25ft from fixture body and RGB 45ft from fixture body. See Cubix/Apex Hanger Guide for more information.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**RGB:** DMX controller supplied by others.



SAMPLE CATALOG NUMBER:		F-	BLK-	1-	A
GL-2767-					
MODEL NO.	LAMPING	FINISH	HANGER	OPTIONS	
<b>GL-2765</b> W in 24"x24" 10lbs B in 3" 4.5kg H in 11"-145"	<b>A.</b> 24LED30 <b>AL.</b> 24LED30LO <b>B.</b> 24LED35 <b>BL.</b> 24LED35LO <b>C.</b> 24LED40 <b>CL.</b> 24LED40LO <b>D.</b> RGB	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze  <b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBN-</b> Terra Brown <b>TBZ-</b> Textured Bronze	<b>1. Cable - Standard</b>  Drivers mounted remotely. See Cubix Hanger Guide for more information. <b>2. Oversized</b>  Drivers mounted inside oversized canopy. See Cubix Hanger Guide for more information.	<b>A. No Options</b> <b>BC. Black Cord</b> Fixture supplied with black power cord. <b>EL. Emergency LED</b> Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.	
<b>GL-2766</b> W in 36"x36" 15lbs B in 3" 6.8kg H in 18.75"-145"	<b>E.</b> 36LED30 <b>EL.</b> 36LED30LO <b>F.</b> 36LED35 <b>FL.</b> 36LED35LO <b>G.</b> 36LED40 <b>GL.</b> 36LED40LO <b>H.</b> RGB		<b>3. Vertical Remote Canopy</b>  Drivers mounted remotely. See Cubix Hanger Guide for more information.		
<b>GL-2767</b> W in 48"x48" 15lbs B in 3" 6.8kg H in 18.75"-145"	<b>I.</b> 48LED30 <b>IL.</b> 48LED30LO <b>J.</b> 48LED35 <b>JL.</b> 48LED35LO <b>K.</b> 48LED40 <b>KL.</b> 48LED40LO <b>L.</b> RGB		<b>4. Vertical Integral Canopy</b>  Drivers mounted inside 12.5" oversized canopy. See Cubix Hanger Guide for more information.		
<b>GL-2768</b> W in 60"x60" 19lbs B in 3" 10kg H in 25.5"-142"	<b>M.</b> 60LED30 <b>ML.</b> 60LED30LO <b>N.</b> 60LED35 <b>NL.</b> 60LED35LO <b>O.</b> 60LED40 <b>OL.</b> 60LED40LO <b>P.</b> RGB	<b>Premium:</b> <b>SA-</b> Satin Aluminum	<b>Hanger options 1&amp;3 supplied with remote driver box.</b>		
<b>GL-2769</b> W in 72"x72" 22lbs B in 3" 10kg H in 25.5"-142"	<b>Q.</b> 72LED30 <b>QL.</b> 72LED30LO <b>R.</b> 72LED35 <b>RL.</b> 72LED35LO <b>S.</b> 72LED40 <b>SL.</b> 72LED40LO <b>T.</b> RGB				

All Dimensions are nominal.

### Light Source Definition

High Lumen Output						Low Lumen Output					
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
24LED30/35/40	80	+85	50000	6051	3000/3500/4000	24LED30/35/40LO	43	+85	50000	3207*	3000/3500/4000
36LED30/35/40	112	+85	50000	9071*	3000/3500/4000	36LED30/35/40LO	56	+85	50000	4536*	3000/3500/4000
48LED30/35/40	160	+85	50000	12095*	3000/3500/4000	48LED30/35/40LO	85	+85	50000	6410*	3000/3500/4000
60LED30/35/40	200	+85	50000	15119*	3000/3500/4000	60LED30/35/40LO	112	+85	50000	8466*	3000/3500/4000
72LED30/35/40	224	+85	50000	18142*	3000/3500/4000	72LED30/35/40LO	112	+85	50000	9071*	3000/3500/4000
RGB	Contact Factory for Details										

\*Pending IES Testing

