

# ARTICLE

## Schoolhouse Pendant






9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.
- Canopy:** May be mounted on flat or sloped ceilings up to 40°.
- Body:** 18ga steel or .050 aluminum glass fitter.
- Glass:** White opal diffuser hand blown in the USA.
- Modifications:** Consult factory for lamping or cluster options.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Surge Protection:** External surge protector provided as standard.

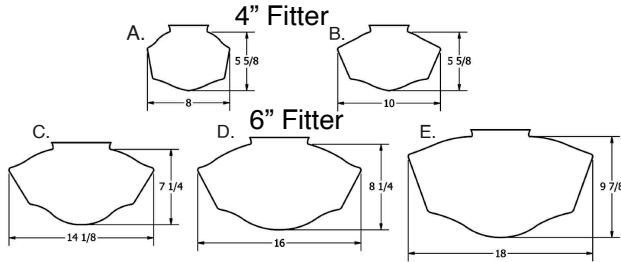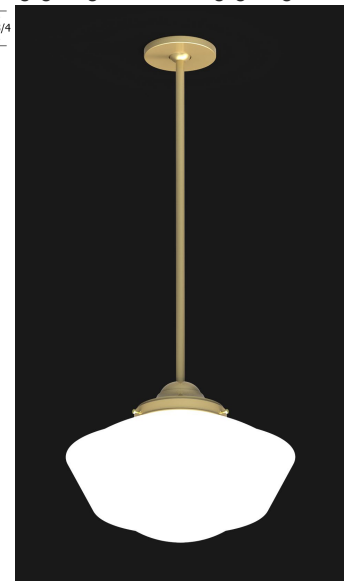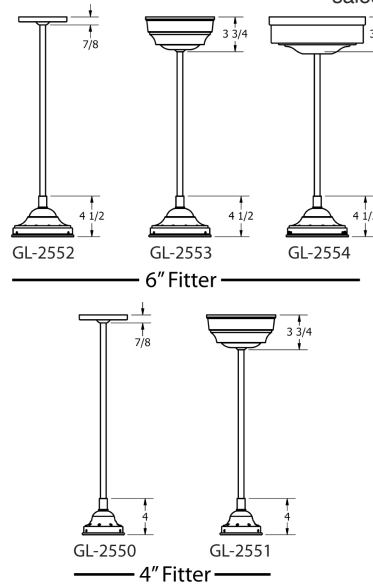

SAMPLE CATALOG NUMBER:						036
GL-2553-		W5-	A-	NSN-	A-	
MODEL NO.	LAMPING	GLASS	FINISH	OPTION(S)	OVERALL HEIGHT	
<b>GL-2550</b>	<b>IN1.</b> 1MED 120V only	<b>4" Fitter:</b> <b>A.</b> 8" x 5 5/8" <b>B.</b> 10" x 5 5/8"	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze  <b>Textured Powder</b> <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBN</b> -Terra Brown <b>TBZ</b> -Textured Bronze  <b>Premium:</b> <b>SA</b> -Satin Aluminum	<b>A.</b> No Options <b>B.</b> Damp Location Available in powder coat or Satin Aluminum finish. <b>E.</b> Emergency Ballast Operates one fluorescent lamp. Remote mount up to 5' from lamps in controlled environment with an area temperature range of 32°-131°F. Non-dimming compact fluorescent only. Specify 120 or 277 voltage. <b>EL.</b> Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	Specify overall height in inches.	
<b>GL-2551</b>	<b>E.</b> 1CFQ13 <b>H.</b> 1CFT26 <b>Y0.</b> 11LED30 <b>F.</b> 1CFQ18 <b>I.</b> 1CFT32 <b>Y5.</b> 11LED35 <b>G.</b> 1CFQ26 <b>J.</b> 1CFT42 <b>Y4.</b> 11LED40					
<b>GL-2552</b>	<b>IN1.</b> 1MED 120V only	<b>6" Fitter:</b> <b>C.</b> 14 1/8" x 7 1/4" <b>D.</b> 16" x 8 1/4" <b>E.</b> 18" x 9 7/8"				
<b>GL-2553</b> Available with all GL-2551 lamping	<b>K.</b> 2CFQ13 <b>N.</b> 2CFT26 <b>Y0.</b> 11LED30 <b>L.</b> 2CFQ18 <b>O.</b> 2CFT32 <b>Y5.</b> 11LED35 <b>M.</b> 2CFQ26 <b>P.</b> 2CFT42 <b>Y4.</b> 11LED40 <b>W0.</b> 16LED30 <b>W5.</b> 16LED35 <b>W4.</b> 16LED40					
<b>GL-2554</b>	<b>Q.</b> 3CFT26    Specify Voltage Q-S: <b>R.</b> 3CFT32    1 - 120V <b>S.</b> 3CFT42    2 - 277V					

All dimensions are nominal.

### Light Source Definition

Lamp	Fluorescent	Lamp Base	Rated Life Hrs <sup>1</sup>	Rated Lumens <sup>1</sup>	Code	LED	Total Wattage	Delivered Lumens	Kelvin
CFQ13	CFQ 13W	G24q-1	17000	755	Y0	11LED30	11	1075	3000
CFQ18	CFQ 18W	G24q-2	17000	970	Y5	11LED35	11	1075	3500
CFQ26	CFQ 26W	GX24q-3 4PIN	17000	1530	Y4	11LED40	11	1075	4000
CFT26	CFTR 26W	GX24q-3 4PIN	17000	1530	W0	16LED30	16	1652	3000
CFT32	CFTR 32W	GX24q-3 4PIN	17000	2010	W5	16LED35	16	1652	3500
CFT42	CFTR 42W	GX24q-4 4PIN	17000	2690	W4	16LED40	16	1652	4000
IN1		Medium							

Universal Voltage unless otherwise specified.

<sup>1</sup>Per GE lamp product catalog. Contact factory for availability of other lamp configurations.