

# TAHOE II

## Interior Square Semi-Surface Mount



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs are field serviceable.



**LED Dimming:** 1% 0-10V dimming standard.

**Shade:** Standard white fabric shade with integral satin white diffuser. Custom shapes, sizes, and colors available.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Modifications:** Consult factory for lamping or cluster options.

**Surge Protection:** External surge protector provided as standard.

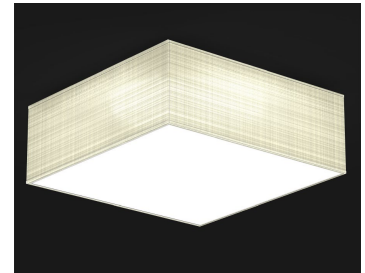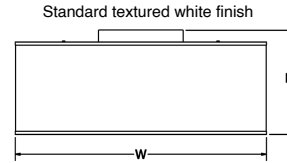

SAMPLE CATALOG NUMBER: GL-3732-		L55-	W-	A
MODEL NO.		LAMPING	SHADE	OPTIONS
<b>GL-3730</b> 5lbs 2.25kg	W in 14" D in 9.5" mm 355 mm 240	IN3. 3MED* L10. 1LED30 L15. 1LED35 L14. 1LED40	W White C Cream R Red BL Blue O Olive S Stone	A. No Options DE. ECO Dimming Lutron Ecosystem dimming CF lamping option. Specify voltage and wattage after dimming code. DV. Mark VII Dimming Advance Mark VII dimming CF lamping option. Specify voltage and wattage after dimming code. DX. Mark X Dimming Advance Mark X dimming CF lamping option. Specify voltage and wattage after dimming code.
<b>GL-3731</b> 5lbs 2.25kg	W in 18" D in 9.5" mm 460 mm 265	IN3. 3MED* L10. 1LED30 L15. 1LED35 L14. 1LED40	Washable: WW White WC Cream WT Tan WB Brown	E. Emergency Remote mount up to 5' from lamps in controlled environment with an area temperature range of 32°-131°F. Compact fluorescent only. Specify 120 or 277 voltage. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
<b>GL-3732</b> 15lbs 7kg	W in 24" D in 11.5" mm 610 mm 295	IN3. 3MED* F4. 4CF L50. 5LED30 L55. 5LED35 L54. 5LED40		
<b>GL-3733</b> 18lbs 8kg	W in 30" D in 12.5" mm 760 mm 320	IN3. 3MED* F4. 4CF L50. 5LED30 L55. 5LED35 L54. 5LED40		
<b>GL-3734</b> 20lbs 9kg	W in 36" D in 13.5" mm 915 mm 340	IN6. 6MED* F6. 6CF L80. 8LED30 L85. 8LED35 L84. 8LED40		
<b>GL-3735</b> 25lbs 11.5kg	W in 48" D in 15.5" mm 1220 mm 395	IN6. 6MED* F6. 6CF L80. 8LED30 L85. 8LED35 L84. 8LED40		

\*120 Volt Only

All Dimensions are nominal.

### Shade

Standard		Washable - Trilam			
	White		Cream		Blue
	Stone		Red		Olive
	White		Tan		Cream
	Brown				

Custom fabrics available upon request. Contact factory.  
Reproduced graphic representation. Please contact sales@glighting.com for fabric samples.

### Light Source Definition

Code	Lamp	Fluorescent	Lamp Base	Lamp Lumens	Code	Lamp	Total Wattage	Delivered Lumens	Kelvin
F4,F6	CF	CF 26W/32W/42W	GX24q-3/4 4PIN	1530/2040/2690	L50	72LED30	72W	7436	3000
IN3,IN6	MED	A-19	Medium		L55	72LED35	72W	7436	3500
					L54	72LED40	72W	7436	4000
					L80	114LED30	114W	12248	3000
					L85	114LED35	114W	12248	3500
					L84	114LED40	114W	12248	4000

Universal Voltage unless otherwise specified.