

TAHOE II WARM DIM

Interior Square Semi-Surface Mount



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Warm Dim: LED option (WD) features warm dimming technology that dims smoothly from 3500K-1800K with standard 1% 0-10V dimming.



LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.

Shade: Standard white fabric shade with integral satin white diffuser. Custom shapes, sizes, and colors available.

Finish: Highly durable oven cured no VOC premium powder coat.

Surge Protection: External surge protector provided as standard.

Standard textured white finish

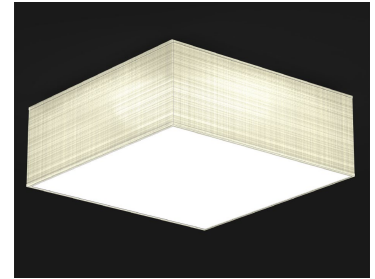

SAMPLE CATALOG NUMBER: GL-3732-				WD5-	W-	A
MODEL NO.				LAMPING	SHADE	OPTIONS
GL-3732	W in 24" 15lbs 7kg	D in 11.5" mm 295	mm 610	WD5	W White C Cream R Red BL Blue O Olive S Stone	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-3733	W in 30" 18lbs 8kg	D in 12.5" mm 320	mm 760	WD5	Washable: WW White WC Cream WT Tan WB Brown	
GL-3734	W in 36" 20lbs 9kg	D in 13.5" mm 340	mm 915	WD8		
GL-3735	W in 48" 25lbs 11.5kg	D in 15.5" mm 395	mm 1220	WD8		

All Dimensions are nominal.

Shade

Standard					
	White		Cream		Blue
	Stone		Red		Olive
Washable - Trilam					
	White		Tan		Cream
	Brown				

Custom fabrics available upon request. Contact factory.
Reproduced graphic representation. Please contact sales@glighting.com for fabric samples.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
WD5	107	7736	3500-1800
WD8	170	12248	3500-1800

Universal Voltage unless otherwise specified.