

# VECTOR

## Indoor Surface Mount



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs are field serviceable.

**LED Dimming:** 1% 0-10V dimming standard with LED lamping option.



**Body:** Body formed with 18ga steel.

**Acrylic:** UL-94 HB Flame Class rated.

**Modifications:** Consult factory for lamping, cluster, or sizing options.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Surge Protection:** External surge protector provided as standard.

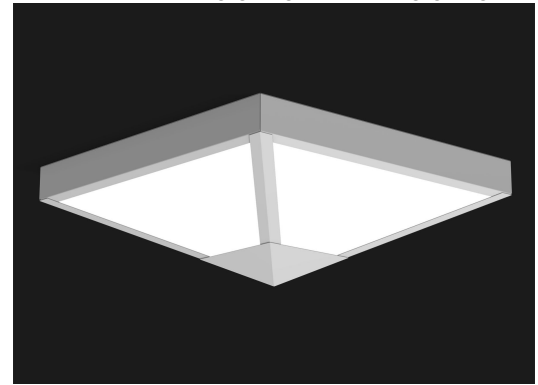

SAMPLE CATALOG NUMBER: GL-3632-		L85-	W-	NSN-	A-
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)	
<b>GL-3630</b> 21lbs W in 24" mm 610 10kg D in 9" mm 225	<b>L40.</b> 4LED30 <b>F4.</b> 4CF <b>L45.</b> 4LED35 <b>IN4.</b> 4MED <b>L44.</b> 4LED40	Standard: <b>W.</b> White Opal  Optional: <b>S.</b> Satin White <b>F.</b> Faux Alabaster <b>M.</b> Earth Marble	Standard: Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze  Textured Powder <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBN-</b> Terra Brown <b>TBZ-</b> Textured Bronze	<b>A.</b> No Options <b>B.</b> Damp Location Available in powder coat finish. <b>DE.</b> ECO Dimming Lutron Ecosystem dimming CF lamping option. Specify voltage and wattage after dimming code. <b>DV.</b> Mark VII Dimming Advance Mark VII dimming CF lamping option. Specify voltage and wattage after dimming code. <b>DX.</b> Mark X Dimming Advance Mark X dimming CF lamping option. Specify voltage and wattage after dimming code. <b>E.</b> Emergency Ballast Operates one fluorescent lamp. Remote mount up to 5' from lamps in controlled environment with an area temperature range of 32°- 131°F. Non-dimming compact fluorescent only. Specify 120 or 277 voltage. <b>EL.</b> Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	
<b>GL-3631</b> 28lbs W in 30" mm 760 13kg D in 10 1/2" mm 265	<b>L80.</b> 8LED30 <b>F4.</b> 4CF <b>L85.</b> 8LED35 <b>IN4.</b> 4MED <b>L84.</b> 8LED40	Acrylic is UL-94 HB Flame Class rated.	(Same as above)	(Same as above)	
<b>GL-3632</b> 37lbs W in 36" mm 915 17kg D in 12 1/8" mm 310	<b>L80.</b> 8LED30 <b>F8.</b> 8CF <b>L85.</b> 8LED35 <b>IN8.</b> 8MED <b>L84.</b> 8LED40	(Same as above)	(Same as above)	(Same as above)	
<b>GL-3633</b> 52lbs W in 46" mm 1170 24kg D in 14 3/4" mm 375	<b>L80.</b> 8LED30 <b>F8.</b> 8CF <b>L85.</b> 8LED35 <b>IN8.</b> 8MED <b>L84.</b> 8LED40	(Same as above)	(Same as above)	(Same as above)	

Fixtures over 50 lbs require reinforced junction box  
 All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	Kelvin	Board Lumens	Code	Lamp	Fluorescent	Lamp Base	Lamp Lumens <sup>1</sup>
L40	57	3000	7580	F4, F8	CF	CF 26W/32W/42W	GX24q-3/4 4PIN	1530/2040/2690
L45	57	3500	7580	IN4, IN8	Med	A-19	Medium	
L44	57	4000	7580					
L80	113	3000	15160					
L85	113	3500	15160					
L84	113	4000	15160					

Universal Voltage unless otherwise specified.

<sup>1</sup>Per MAXLITE & GE lamp products catalog

Contact factory for availability of other lamp configurations including induction and metal halide.

