

# EOS TUNABLE WHITE

## Closed Acrylic Interior Surface Mount



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**Tunable White:** LED option (TW) features tunable white technology that adjusts from 6500K-2700K.


**LED Tuning:** CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.

**LED Dimming:** Intensity adjustable using 1% 0-10V wall control. TRIAC, DALI, or DMX available upon request.

**Acrylic:** Satin white acrylic is UL-94 HB Flame Class rated.

**Finish:** Highly durable oven cured no VOC premium powder coat. Fixture textured white.

**Surge Protection:** External surge protector provided as standard.

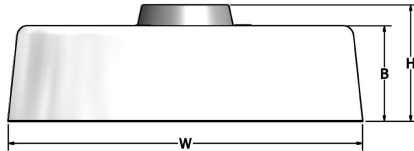

### SAMPLE CATALOG NUMBER:

GL-3635-

TW5-

A-

MODEL NO.	LAMPING	OPTIONS
<b>GL-3635</b> W in 26" mm 660 8lbs B in 8" mm 205 3.5kg H in 8 3/8" mm 215  Fixture Painted Textured White	<b>TW5</b>	<b>A. No Options</b> <b>EL. Emergency Ballast</b> Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
<b>GL-3636</b> W in 37 1/2" mm 950 10lbs B in 8" mm 205 4.5kg H in 8 3/8" mm 215  Fixture Painted Textured White	<b>TW8</b>	

All Dimensions are nominal.

### Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
TW5	71	7047	2700-6500
TW8	113	11802	2700-6500

Universal Voltage unless otherwise specified.