

EOS WARM DIM

Closed Acrylic Interior Surface Mount



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Warm Dim: LED option (WD) features warm dimming technology that dims smoothly from 3500K-1800K with standard 1% 0-10V dimming.


LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.

Acrylic: Satin white acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat.

Fixture painted textured white.

Surge Protection: External surge protector provided as standard.

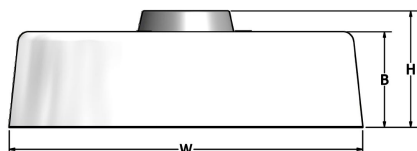

SAMPLE CATALOG NUMBER:

GL-3635-

WD5-

A-

MODEL NO.	LAMPING	OPTIONS
GL-3635 W in 26" mm 660 8lbs B in 8" mm 205 3.5kg H in 8 3/8" mm 215 Fixture Painted Textured White	WD5	A. No Options EL. Emergency Ballast Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-3636 W in 37 1/2" mm 950 10lbs B in 8" mm 205 4.5kg H in 8 3/8" mm 215 Fixture Painted Textured White	WD8	

All Dimensions are nominal.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
WD5	107	7047	3500-1800
WD8	170	11802	3500-1800

Universal Voltage unless otherwise specified.