

EOS TUNABLE WHITE

Closed Acrylic Interior Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Tunable White: LED option (TW) features tunable white technology that adjusts from 6500K-2700K. For proper control, fixture needs two 0-10V dimming controls.

LED Tuning: CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.



LED Dimming: Intensity adjustable using 1% 0-10V wall control. TRIAC, DALI, or DMX available upon request.


Acrylic: Satin white acrylic is UL-94 HB Flame Class rated.

Cable Hanger: Comes with 72" cable and white cord for on-site adjustability.

Finish: Highly durable oven cured no VOC premium powder coat. Fixture painted textured white.

Surge Protection: External surge protector provided as standard.

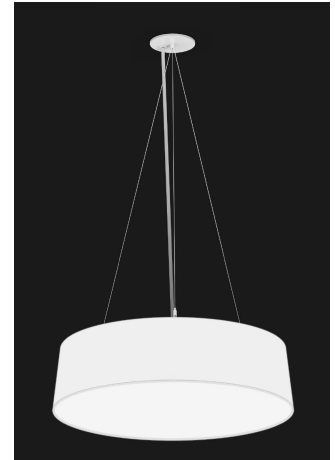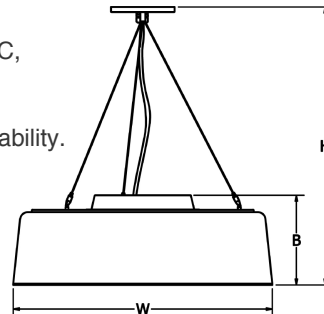

SAMPLE CATALOG NUMBER: GL-2635-					TW5-	1-	A
MODEL NO.					LAMPING	HANGER	OPTIONS
GL-2635 W in 26" mm 660 10lbs B in 8" mm 205 4.5kg H in 20"-68" mm 510-1730 Fixture Painted Textured White					TW5	1. Cable 	A. No Options LC. 150" Cord & Cable Supplied with 150" Cord & Cable. EL. Emergency Ballast Remote mount up to 10' from light source in controlled environment with an area temperature range of 32"-131°F. Specify 120 or 277 voltage.
GL-2636 W in 37 1/2" mm 950 15lbs B in 8" mm 205 6.8kg H in 20"-68" mm 510-1730 Fixture Painted Textured White							

All Dimensions are nominal.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
TW5	71	7047	2700-6500
TW8	113	11802	2700-6500

Universal Voltage unless otherwise specified.