

FRONTIER II RGB+W

Closed Acrylic Interior Surface Mount



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

RGB+White: LED option (RGB30, RGB35, & RGB40) features a full power white and RGB color changing light source. A second circuit controls the white channel. RGB channel wired DMX ready, full white 1% 0-10V dimming standard.

RGB: LED option features RGB color changing light source. RGB channel wired DMX ready.



Static Color: LED options (Red, Green, or Blue) feature static color.

Acrylic: One-piece acrylic lens. Standard top and bottom satin white with all acrylic options.

Finish: Highly durable oven cured no VOC premium powder coat. Fixture textured white.

Surge Protection: External surge protector provided as standard.


DMX: Controls by others.

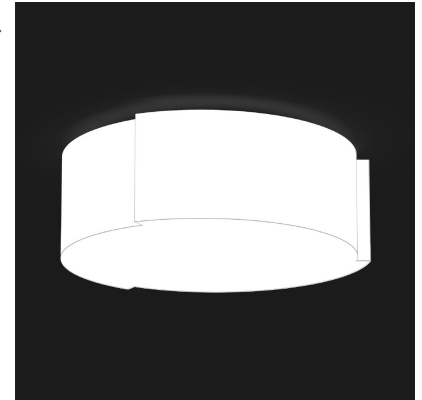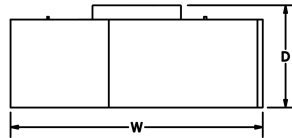


SAMPLE CATALOG NUMBER: GL-3507-		D-	S-	A-
MODEL NO.		LAMPING	ACRYLIC	OPTIONS
GL-3507	W in 24" mm 660 8lbs D in 9 3/4" mm 250 4.5kg Fixture Painted Textured White	R. RED G. GREEN B. BLUE A. RGB* C. RGB30* D. RGB35* E. RGB40*	Standard: S Satin White Optional: WL White Linen JT Jute Linen Acrylic is UL-94 HB Flame Class rated.	A. No Options EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-3508	W in 30" mm 950 12lbs D in 11 3/4" mm 300 5.5kg Fixture Painted Textured White			

All Dimensions are nominal.
*DMX controls supplied by others.


Acrylic Lens



Satin White



White Linen



Jute Linen

Standard white satin bottom diffuser with all acrylic options.

Light Source Definition

Fixture	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens
GL-3507	72W	+80	50000	7047
GL-3508	72W	+80	50000	7047

Universal Voltage unless otherwise specified.