

FRONTIER II WARM DIM

Closed Acrylic Interior Surface Mount



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION



Warm Dim: LED option (WD) features warm dimming technology that dims smoothly from 3500K-1800K with standard 1% 0-10V dimming.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.

Acrylic: One-piece acrylic lens. Standard top and bottom satin white with all acrylic options.

Finish: Highly durable oven cured no VOC premium powder coat. Fixture textured white.


Surge Protection: External surge protector provided as standard.

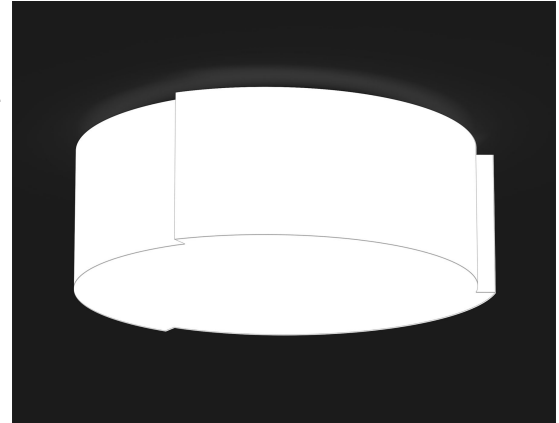

SAMPLE CATALOG NUMBER:					WD5-	S-	A-
GL-3507-					LAMPING	ACRYLIC	OPTIONS
GL-3507	W in	24"	mm	660	WD5	Standard: S Satin White Optional: WL White Linen JT Jute Linen Acrylic is UL-94 HB Flame Class rated.	A. No Options EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
	8lbs D in	8"	mm	205			
Fixture Painted Textured White GL-3508 W in 30" mm 950 12lbs D in 10" mm 255 5.5kg Fixture Painted Textured White							

All Dimensions are nominal.

Acrylic Lens

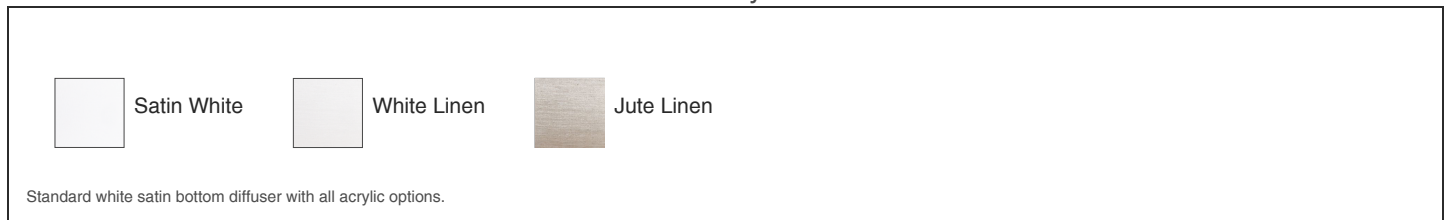

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
WD5	108W	7467	3500-1800

Universal Voltage unless otherwise specified.