

BASILONE

Indoor LED Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency LEDs.

LED Dimming: 1% 0-10V dimming standard.

Body: .050 spun aluminum cap. Black perforated decorative ring.
Driver integral.

Acrylic: Acrylic is UL-94 HB Flame Class rated.

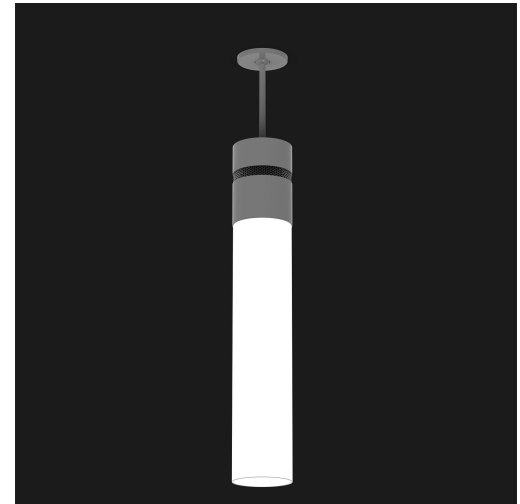
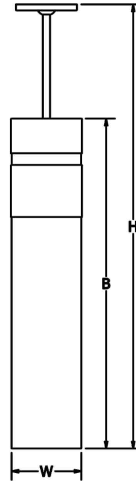
Cable Hanger Option: Standard 72" cable and white cord for on-site adjustability.



Canopy: Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°.

Finish: Highly durable oven cured no VOC premium powder coat.

Modifications: Consult factory for lamping or cluster options.

Surge Protection: External surge protector provided as standard.



SAMPLE CATALOG NUMBER:						
GL-6000-		A5-	W-	NSN-	1-	A- 038
MODEL NO.		LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)
GL-6000 W in 6" mm 150 B in 28 1/2" mm 725 H in 38" mm 965 12lbs 7.4kg		A0. LED30	Standard:	Standard:	1. Stem	A. No Options
		A5. LED35	W White Opal	Powder Coat		BC. Black Cord Fixture supplied with black power cord.
		A4. LED40	S Satin White	BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue	2. Cable 	LC. 150" Cord & Cable Fixture supplied with 150" of cable and standard white cord or optional black cord. Hanger option 2 only.
GL-6001 W in 6" mm 150 B in 40 1/2" mm 1030 H in 50" mm 1270 20lbs 9kg		A0. LED30	Acrylic is UL-94 HB Flame Class rated.	Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone Premium: SA -Satin Aluminum	Standard White Power Cord	EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
		A5. LED35				
		A4. LED40				
GL-6002 W in 6" mm 150 B in 57" mm 1448 H in 68" mm 1702 30lbs 11.3kg		A0. LED30				
		A5. LED35				
		A4. LED40				

Fixtures over 50 lbs require reinforced junction box

Light Source Definition

Lamp	LED	Rated Life Hrs	Delivered Lumens	Kelvin	CRI
LED30	(1) 17W LED	50000	1166	3000	90
LED35	(1) 17W LED	50000	1166	3500	90
LED40	(1) 17W LED	50000	1166	4000	90

Universal Voltage unless otherwise specified.