

BATTEN

Indoor ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.



LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request. Integral driver.

Body: Formed .050 aluminum or 18ga steel.

Finish: Highly durable oven cured no VOC premium powder coat.

Modifications: Consult factory for lamping options.

Surge Protection: External surge protector provided.

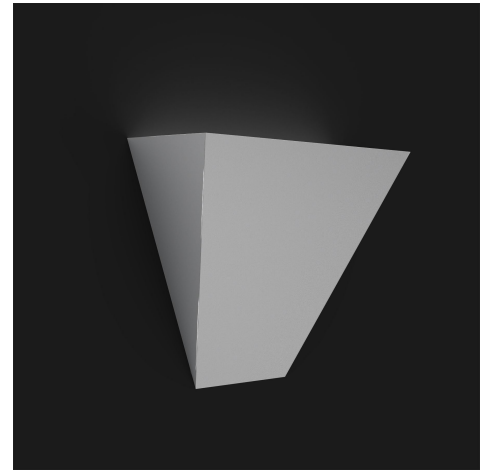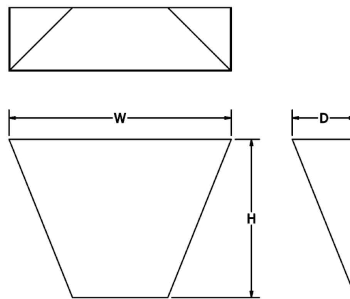

SAMPLE CATALOG NUMBER: GL-4505-						E5-	NSN-	A
MODEL NO.						LAMPING	FINISH	OPTION(S)
GL-4505	W in	14"	mm	355	E0. 1LED30	Standard:	A. No Options EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage. L. Perforated Top Lens Painted white perforated metal top lens.	
	H in	10"	mm	255	E5. 1LED35	Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue		
	D in	4"	mm	100	E4. 1LED40	Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone		

All dimensions are nominal.

Light Source Definition

Code	LED	CRI	Rated Life Hrs	Kelvin	Board Lumens
1LED30	13W LED	+80	50000	3000	1895
1LED35	13W LED	+80	50000	3500	1895
1LED40	13W LED	+80	50000	4000	1895

Universal Voltage unless otherwise specified.