

CARDIFF

Indoor ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.



LED Dimming: Integral 0-10V dimming driver standard.

Acrylic: Acrylic is UL-94 HB Flame Class rated.

Body: Formed 18ga steel or .050 aluminum body. Optional white perforated top and bottom diffuser.

Finish: Highly durable oven cured no VOC premium powder coat.

Custom: Contact factory for custom lengths and lamping.

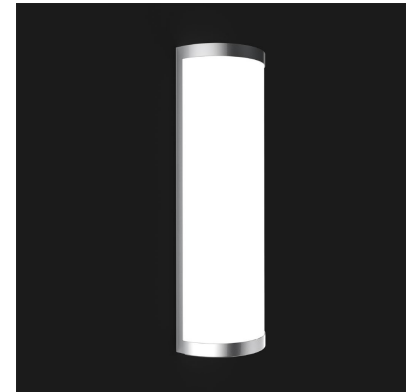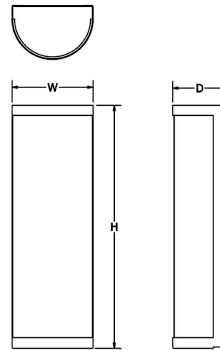

| SAMPLE CATALOG NUMBER: | | | | | |
|------------------------|----------|-------------------|--|---|---|
| GL-4515- | | F5- | W- | NSN- | A |
| MODEL NO. | | LAMPING | ACRYLIC | FINISH | OPTION(S) |
| GL-4515 | W in 6" | F0. 1LED30 | Standard: W. White Opal S. Satin White Acrylic is UL-94 HB Flame Class rated. | Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone | A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. B. Top Perforated Cover Painted white. C. BTM Perforated Cover Painted white. |
| | H in 18" | F5. 1LED35 | | | |
| | D in 4" | F4. 1LED40 | | | |

All dimensions are nominal.

Light Source Definition

| Lamp | LED | CRI | Rated Life Hrs | Board Lumens | Kelvin |
|--------|-----|-----|----------------|--------------|--------|
| 1LED30 | 14W | 80 | 50000 | 1950 | 3000 |
| 1LED35 | 14W | 80 | 50000 | 1950 | 3500 |
| 1LED40 | 14W | 80 | 50000 | 1950 | 4000 |

Universal Voltage unless otherwise specified.