

# CARDIFF WARM DIM

## Indoor ADA Sconce



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**Warm Dim:** LED option (WD) features warm dimming technology that dims smoothly from 3500K-1800K with standard 0-10V dimming.

**LED Dimming:** Standard integral 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.



**Acrylic:** Acrylic is UL-94 HB Flame Class rated.

**Body:** Formed 18ga steel or .050 aluminum body. Optional painted white perforated top and bottom diffuser.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Custom:** Contact factory for custom lengths and lamping.

**Surge Protection:** External surge protector provided as standard.

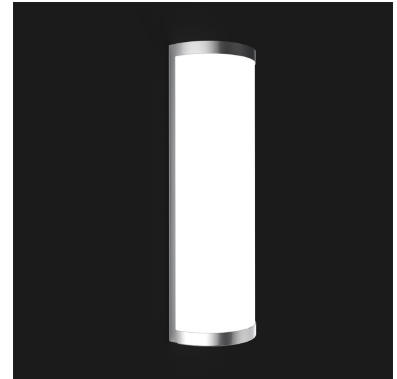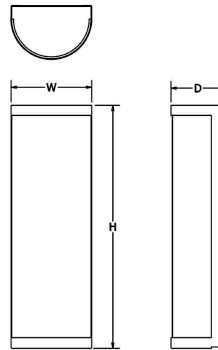

SAMPLE CATALOG NUMBER:				
GL-4515-		WD1-	W-	NSN-
MODEL NO.		LAMPING	ACRYLIC	FINISH
<b>GL-4515</b>	W in 6"	<b>WD1</b>	Standard: <b>W.</b> White Opal <b>S.</b> Satin White  Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone
	H in 18"			
	D in 4"			
				<b>A.</b> No Options <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. <b>B.</b> Top Perforated Cover Painted white. <b>C.</b> BTM Perforated Cover Painted white.

All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	Rated CRI	Rated Life Hrs	Board Lumens	Board Kelvin
WD1	21W	+90	50000	1950	3500-1800

Universal Voltage unless otherwise specified.