

# CENTRIC

## Interior Pendant



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency 90CRI mid-power LEDs. Universal voltage.

**Uplight:** Optional uplight is wired on a second circuit.

**Lower Output:** Lamping code ending with LO features lower lumen output.

**LED Driver:** Must be mounted within 25ft from fixture body.

**Finish:** Highly durable oven cured no VOC premium powder coat.

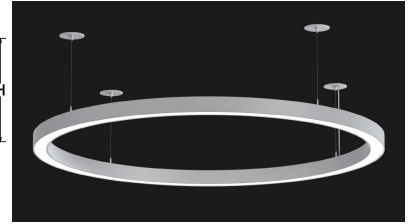
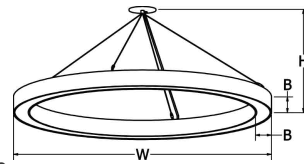
**Canopy:** Matches fixture finish.





**Cable Hanger:** Standard 150" cable and white cord for on-site adjustability.

**Modifications:** Consult factory for modified fixture sizes and lumen packages.

**Surge Protection:** External surge protector provided as standard.

**LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, and DMX available upon request.



SAMPLE CATALOG NUMBER:					
GL-2307-	B-	B-	BLK-	1- A	
MODEL NO.	LAMPING		FINISH	HANGER	OPTIONS
<b>GL-2305</b> W in 24" 7lbs B in 3" x 3" 3.2kg H in 11"-145"	<b>Down:</b> A. LED30 B. LED35 C. LED40 D. LED30LO E. LED35LO F. LED40LO	<b>Up:</b> A. LED30 B. LED35 C. LED40 D. LED30LO E. LED35LO F. LED40LO G. NONE	<b>Standard:</b> Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue  <b>Textured Powder</b> TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone  <b>Premium:</b> SA-Satin Aluminum	<b>1. Cable - Standard</b>  Drivers mounted remotely. See Centric Hanger Guide for more information.	<b>A. No Options</b> <b>BC. Black Cord</b> Fixture supplied with black power cord. <b>EL. Emergency LED</b> Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
<b>GL-2306</b> W in 36" 10lbs B in 3" x 3" 4.5kg H in 18.75"-145"				<b>2. Oversized</b>  Drivers mounted inside oversized canopy. See Centric Hanger Guide for more information.	
<b>GL-2307</b> W in 48" 14lbs B in 3" x 3" 6.3kg H in 18.75"-145"				<b>3. Vertical Remote Canopy</b>  Drivers mounted remotely. See Centric Hanger Guide for more information.	
<b>GL-2308</b> W in 60" 18lbs B in 3" x 3" 8.2kg H in 18.75"-145"				<b>4. Vertical Integral Canopy</b>  Drivers mounted inside 12.5" oversized canopy. See Centric Hanger Guide for more information. <b>Hanger options 1&amp;3 supplied with remote driver box.</b>	
<b>GL-2309</b> W in 72" 22lbs B in 3" x 3" 10kg H in 18.75"-145"					
<b>GL-2310</b> W in 96" 28lbs B in 3" x 3" 12.7kg H in 18.75"-145" Fixture Body Built in Three Segments and Six Acrylic Segments					
<b>GL-2311</b> W in 120" 36lbs B in 3" x 3" 16.3kg H in 18.75"-145" Fixture Body Built in Three Segments and Six Acrylic Segments					

All Dimensions are nominal.

### Light Source Definition

Fixture	Lumen Output					Code	Low Lumen Output				
	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin		Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
GL-2305	67	+90	50000	4518	3000/3500/4000	GL-2305	36	+90	50000	2788	3000/3500/4000
GL-2306	94	+90	50000	7003	3000/3500/4000	GL-2306	55	+90	50000	4419	3000/3500/4000
GL-2307	132	+90	50000	9804	3000/3500/4000	GL-2307	77	+90	50000	6120	3000/3500/4000
GL-2308	158	+90	50000	11837	3000/3500/4000	GL-2308	91	+90	50000	7364	3000/3500/4000
GL-2309	189	+90	50000	14051	3000/3500/4000	GL-2309	109	+90	50000	8855	3000/3500/4000
GL-2310	236	+90	50000	17801	3000/3500/4000	GL-2310	136	+90	50000	10075	3000/3500/4000
GL-2311	317	+90	50000	22324	3000/3500/4000	GL-2311	182	+90	50000	14064	3000/3500/4000

Wattage & lumens represent output for one side (up or down).

Universal Voltage unless otherwise specified.