

CENTRIC - Acoustic

Interior Pendant



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Acoustic Panel: 1/2" center acoustic panel reduces noise level in environment.

LED: High efficiency 90CRI mid-power LEDs. Universal voltage.

Uplight: Optional uplight is wired on a second circuit.

Lower Output: Lamping code ending with LO features lower lumen output.

LED Driver: Must be mounted within 25ft from fixture body.

Finish: Highly durable oven cured no VOC premium powder coat.



Canopy: Matches fixture finish.





Cable Hanger: Standard 150" cable and white cord for on-site adjustability.

Modifications: Consult factory for modified fixture sizes and lumen packages.

Surge Protection: External surge protector provided as standard.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, and DMX available upon request.

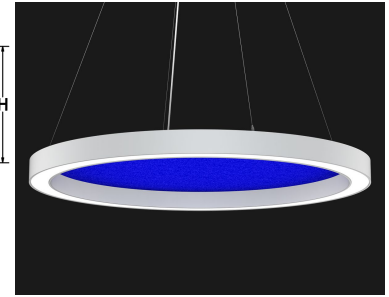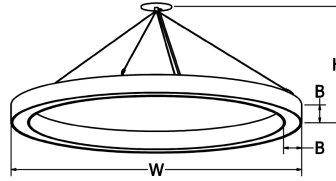

SAMPLE CATALOG NUMBER:						
GL-2317-		B-	B-	BLK-	ABLK-	1- A
MODEL NO.	LAMPING		FINISH	ACOUSTIC	HANGER	OPTIONS
GL-2315 7lbs W 24" 3.2kg B 3" x 3" H 11"-145"	Down: A. LED30 B. LED35 C. LED40 D. LED30LO E. LED35LO F. LED40LO	Up: A. LED30 B. LED35 C. LED40 D. LED30LO E. LED35LO F. LED40LO G. NONE	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone Premium: SA-Satin Aluminum	Standard: Acoustic ABLK-Black ABL-Blue AGR-Gray ALG-Light Gray ARD-Red Seamless Acoustic in 24" thru 48" sizes. Seam in 60" & 72".	1. Cable - Standard  Drivers mounted remotely. See Centric Hanger Guide for more information. 2. Oversized  Drivers mounted inside oversized canopy. See Centric Hanger Guide for more information. 3. Vertical Remote Canopy  Drivers mounted remotely. See Centric Hanger Guide for more information. 4. Vertical Integral Canopy  Drivers mounted inside 12.5" oversized canopy. See Centric Hanger Guide for more information. Hanger options 1&3 supplied with remote driver box.	A. No Options BC. Black Cord Fixture supplied with black power cord. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-2316 10lbs W 36" 4.5kg B 3" x 3" H 18.75"-145"						
GL-2317 14lbs W 48" 6.3kg B 3" x 3" H 18.75"-145"						
GL-2318 18lbs W 60" 8.2kg B 3" x 3" H 18.75"-145"						
GL-2319 22lbs W 72" 10kg B 3" x 3" H 18.75"-145"						

All Dimensions are nominal.

Light Source Definition

Fixture	Lumen Output					Code	Low Lumen Output				
	Total Wattage	Rated CRI	Rated Life Hrs	Delivered Lumens	Kelvin		Total Wattage	Rated CRI	Rated Life Hrs	Delivered Lumens	Kelvin
GL-2315	67	+90	50000	4518	3000/3500/4000	GL-2315	36	+90	50000	2788	3000/3500/4000
GL-2316	94	+90	50000	7003	3000/3500/4000	GL-2316	55	+90	50000	4419	3000/3500/4000
GL-2317	132	+90	50000	9804	3000/3500/4000	GL-2317	77	+90	50000	6120	3000/3500/4000
GL-2318	158	+90	50000	11837	3000/3500/4000	GL-2318	91	+90	50000	7364	3000/3500/4000
GL-2319	189	+90	50000	14051	3000/3500/4000	GL-2319	109	+90	50000	8855	3000/3500/4000

Wattage & lumens represent output for one side (up or down).

Universal Voltage unless otherwise specified.