

CUBIX II - Acoustic

Outer Acrylic Interior Surface Mount





9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- Lower Output:** Lamping code ending with LO features lower lumen output.
- LED Dimming:** Standard 1% 0-10V dimming.
- Driver:** Max remote driver installation distance:
White LED 25ft from fixture body and RGB 45ft from fixture body.
- RGB:** DMX controller supplied by others.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Mounting Plate:** Matches fixture finish.
- Surge Protection:** External surge protector provided as standard.

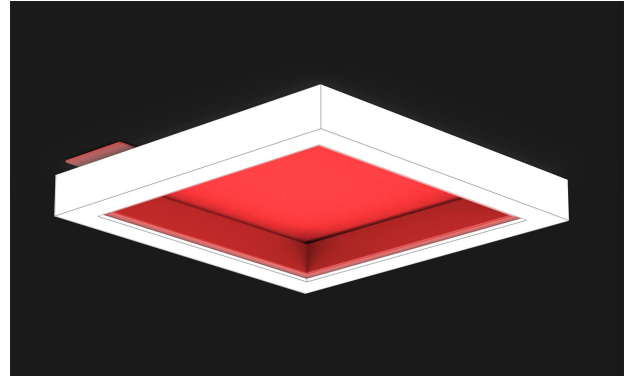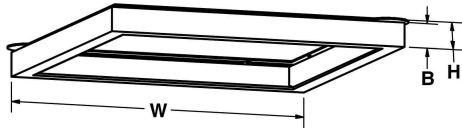

| SAMPLE CATALOG NUMBER: | | J- | BLK- | ABLK- | A |
|------------------------|--|---|--|---|---|
| GL-3832- | | | | | |
| MODEL NO. | | LAMPING | FINISH | ACOUSTIC | OPTIONS |
| GL-3830 | W in 24"x24" 10lbs B in 3" 4.5kg H in 3.5" | A. 24LED30 AL. 24LED30LO B. 24LED35 BL. 24LED35LO C. 24LED40 CL. 24LED40LO D. RGB | Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone Premium: SA- Satin Aluminum* | Standard: Acoustic ABLK- Black ABL- Blue AGR- Gray ALG- Light Gray ARD- Red | A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. |
| GL-3831 | W in 36"x36" 15lbs B in 3" 6.8kg H in 3.5" | E. 36LED30 EL. 36LED30LO F. 36LED35 FL. 36LED35LO G. 36LED40 GL. 36LED40LO H. RGB | | | |
| GL-3832 | W in 48"x48" 15lbs B in 3" 6.8kg H in 3.5" | I. 48LED30 IL. 48LED30LO J. 48LED35 JL. 48LED35LO K. 48LED40 KL. 48LED40LO L. RGB | | | |
| GL-3833 | W in 60"x60" 19lbs B in 3" 10kg H in 3.5" | M. 60LED30 ML. 60LED30LO N. 60LED35 NL. 60LED35LO O. 60LED40 OL. 60LED40LO P. RGB | | | |

All Dimensions are nominal.

Light Source Definition

| High Lumen Output | | | | | | Low Lumen Output | | | | | |
|-------------------|-----------------------------|-----|----------------|------------------|----------------|------------------|---------------|-----|----------------|------------------|----------------|
| Code | Total Wattage | CRI | Rated Life Hrs | Delivered Lumens | Kelvin | Code | Total Wattage | CRI | Rated Life Hrs | Delivered Lumens | Kelvin |
| 24LED30/35/40 | 80 | +85 | 50000 | 6802 | 3000/3500/4000 | 24LED30/35/40LO | 43 | +85 | 50000 | 3605* | 3000/3500/4000 |
| 36LED30/35/40 | 112 | +85 | 50000 | 10203* | 3000/3500/4000 | 36LED30/35/40LO | 56 | +85 | 50000 | 5102* | 3000/3500/4000 |
| 48LED30/35/40 | 160 | +85 | 50000 | 13604* | 3000/3500/4000 | 48LED30/35/40LO | 85 | +85 | 50000 | 7210* | 3000/3500/4000 |
| 60LED30/35/40 | 200 | +85 | 50000 | 17005* | 3000/3500/4000 | 60LED30/35/40LO | 112 | +85 | 50000 | 9523* | 3000/3500/4000 |
| RGB | Contact Factory for Details | | | | | | | | | | |

*Pending IES Testing

Universal Voltage unless otherwise specified.