

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.

LED Dimming: 0-10V / 1-10V dimming to 1% standard.

Acrylic: Acrylic is UL-94 HB Flame Class rated.



Finish: Highly durable oven cured no VOC premium powder coat.

Custom: Contact factory for custom lamping.

Driver: Driver mounted in 4" square by 2 1/8" deep junction box:

Steel City #52171 or equivalent (supplied by others)

Surge Protection: External surge protector provided as standard.

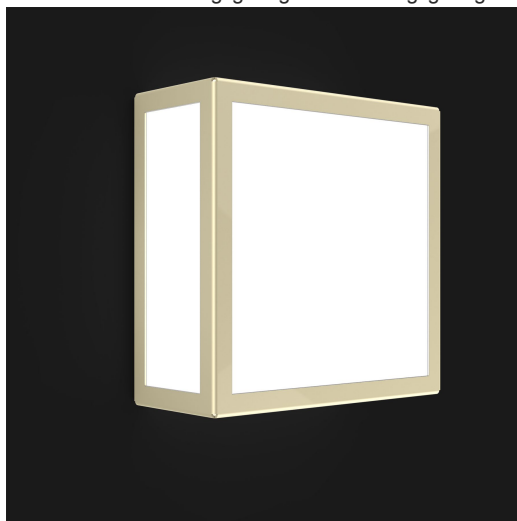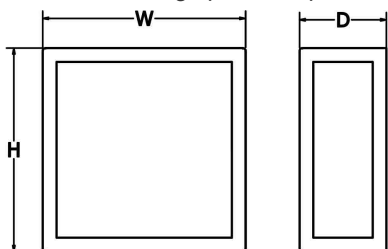

SAMPLE CATALOG NUMBER:

GL-6520-

H5-

S-

NSN-

A

MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)
GL-6520 W in 7" mm 180 H in 7" mm 180 4lbs D in 3 1/2" mm 90 2kg	H0. LED30 H5. LED35 H4. LED40	Standard: W. White Opal Optional: S. Satin White F. Faux Alabaster M. Earth Marble Acrylic is UL-94 HB Flame class rated.	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone	A. No Options B. Top White Perf C. Bottom White Perf EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Board Lumens	Kelvin
LED30	6W	+80	50000	950	3000
LED35	6W	+80	50000	950	3500
LED40	6W	+80	50000	950	4000

Universal Voltage unless otherwise specified.