

FRONTIER II TUNABLE WHITE

Interior Pendant



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Tunable White: LED option (TW) features tunable white technology that adjusts from 6500K-2700K. For proper control, fixture needs two 0-10V dimming controls.

LED Tuning: CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.

LED Dimming: Intensity adjustable using 1% 0-10V wall control. TRIAC, DALI, or DMX available upon request.

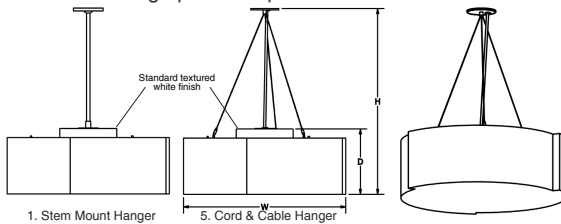
Acrylic: One-piece acrylic lens. Standard top and bottom satin white with all acrylic options.

Canopy: Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord and cable.



Cable Hanger Option: Supplied with standard 72" white cord and cable. Field adjustable.

Finish: Highly durable oven cured no VOC premium powder coat.

Surge Protection: External surge protector provided as standard.



SAMPLE CATALOG NUMBER:

MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT
GL-2507 W in 24" mm 610 18lbs B in 9 3/4" mm 250 7kg H in 20" mm 510	TW5	Standard: S Satin White Optional: WL White Linen JT Jute Linen	Standard: BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	1. Stem  2. Cord & Cable  Supplied with white cord with hanger.	A. No Options BC. Black Cord Fixture supplied with black power cord. Hanger option 5 only. LC. 150" Cord & Cable Supplied with 150" Cord & Cable. Hanger option 2 only. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	Stem mount only - Specify overall height in inches. Standard overall height shown by model no.
GL-2508 W in 30" mm 760 20lbs B in 11 3/4" mm 300 7.9kg H in 22" mm 560		Acrylic is UL-94 HB Flame Class rated.				

All Dimensions are nominal.

Acrylic Lens



Satin White



White Linen



Jute Linen

Standard satin white top and bottom diffuser with all acrylic options.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
TW5	71	7047	2700-6500

Universal Voltage unless otherwise specified.