

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.

Body: Spun .050 aluminum.


Acrylic: Seamless acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat.

Modifications: Consult factory for lamping options.

Surge Protection: External surge protector provided as standard.

Listing: Fixture ETL listed for wet locations.

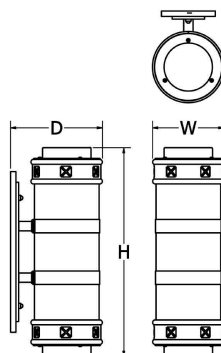

SAMPLE CATALOG NUMBER:					
GL-5300-		L15-	W-	NSN-	A
MODEL NO.		LAMPING	ACRYLIC	FINISH	OPTION(S)
GL-5300 W in 6 5/8" mm 170 H in 20" mm 510 D in 8 1/2" mm 215		L10. 1LED30 L15. 1LED35 L14. 1LED40 L20. 2LED30 L25. 2LED35 L24. 2LED40	Standard: W. White Opal Optional: S. Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	A. No Options EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
L10	14	+80	50000	1017	3000
L15	14	+80	50000	1017	3500
L14	14	+80	50000	1017	4000
L20	28	+80	50000	1992	3000
L25	28	+80	50000	1992	3500
L24	28	+80	50000	1992	4000

Universal Voltage unless otherwise specified.