

GADSDEN RGB+W

Outdoor Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

RGB+White: LED option (RGB30, RGB35, & RGB40) features a full power white and RGB color changing light source. A second circuit controls the white channel. RGB channel wired DMX ready, full white 1% 0-10V dimming standard.

RGB: LED option features RGB color changing light source. RGB channel wired DMX ready.

Static Color: LED options (Red, Green, or Blue) feature static color.


Acrylic: Seamless acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat.

DMX: Controls by others.

Surge Protection: External surge protector provided as standard.

Listing: Fixture ETL listed for wet locations.

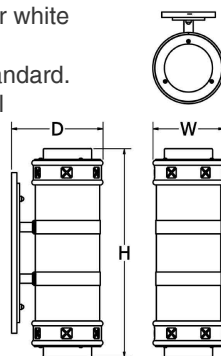

SAMPLE CATALOG NUMBER: GL-5300-				
MODEL NO.	H-	W-	NSN-	A
	LAMPING	ACRYLIC	FINISH	OPTION(S)
GL-5300 W in 6 5/8" mm 170 H in 20" mm 510 D in 8 1/2" mm 215	D. RED E. GREEN F. BLUE G. RGB* H. 14RGB30* I. 14RGB35* J. 14RGB40* K. 28RGB30* L. 28RGB35* M. 28RGB40*	Standard: W. White Opal Optional: S. Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	A. No Options EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.

All dimensions are nominal.

*DMX controls supplied by others.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
14RGB30	14	+80	50000	1017	3000
14RGB35	14	+80	50000	1017	3500
14RGB40	14	+80	50000	1017	4000
28RGB30	28	+80	50000	1992	3000
28RGB35	28	+80	50000	1992	3500
28RGB40	28	+80	50000	1992	4000

Universal Voltage unless otherwise specified.