

# GADSDEN WARM DIM

## Outdoor Sconce



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**Warm Dim:** LED option (WD) features warm dimming technology that dims smoothly from 3500K-1800K with standard 1% 0-10V dimming.


**LED Dimming:** Standard 0-10V dimming. TRIAC, DALI, or DMX available upon request.

**Acrylic:** Seamless acrylic is UL-94 HB Flame Class rated.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Surge Protection:** External surge protector provided as standard.

**Listing:** Fixture ETL listed for wet locations.

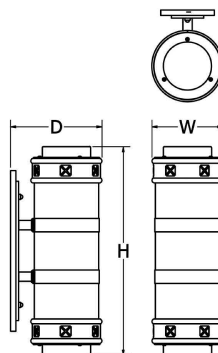

| SAMPLE CATALOG NUMBER:<br>GL-5300-   |                          |   |   |   |
|--|--------------------------|---|---|---|
| MODEL NO.  | LAMPING                  | ACRYLIC   | FINISH  | OPTION(S)   |
| <b>GL-5300</b> W in 6 5/8" mm 170<br>H in 20" mm 510<br>D in 8 1/2" mm 215 | <b>WD1</b><br><b>WD2</b> | <b>Standard:</b><br><b>W.</b> White Opal<br><b>Optional:</b><br><b>S.</b> Satin White<br>Acrylic is UL-94 HB Flame Class rated. | <b>Standard:</b><br>Powder Coat<br><b>BLK</b> -Black<br><b>BL</b> -Blue<br><b>GR</b> -Gray<br><b>LG</b> -Light Gray<br><b>BE</b> -Beige<br><b>PAB</b> -Antique Brass<br><b>PA</b> -Painted Aluminum<br><b>PTC</b> -Painted Copper<br><b>WH</b> -White<br><b>DBZ</b> -Dark Bronze<br><b>NSN</b> -New Satin Nickel<br><b>BRN</b> -Brown<br><b>RD</b> -Red<br><b>CH</b> -Champagne<br><b>RG</b> -Reed Green<br><b>SG</b> -Sungold<br><b>GM</b> -Gun Metal<br><b>POR</b> -Oil Rubbed Bronze<br><b>PG</b> -Pine Green<br><b>DO</b> -Deep Orange<br><b>PV</b> -Purple Violet<br><b>NB</b> -Navy Blue<br><br><b>Textured Powder</b><br><b>TLV</b> -Light Verdigris<br><b>TWH</b> -Textured White<br><b>TBL</b> -Textured Black<br><b>TS</b> -Textured Silver<br><b>TBZ</b> -Textured Bronze<br><b>TST</b> -Stone | <b>A. No Options</b><br><b>EL. Emergency LED</b><br>Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. |

All dimensions are nominal.

### Light Source Definition

| Code | Total Wattage | Delivered Lumens | Kelvin    |
|------|---------------|------------------|-----------|
| WD1  | 21W           | 3837             | 3500-1800 |
| WD2  | 41W           | 6374             | 3500-1800 |

Universal Voltage unless otherwise specified.