

HALFMOON

Interior ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request. Integral driver.


Body: Spun .050 aluminum or 18ga steel.

Acrylic: Seamless acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat.

Modifications: Consult factory for lamping options.

Surge Protection: External surge protector provided as standard.

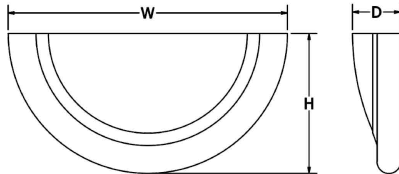

SAMPLE CATALOG NUMBER: GL-4161-					
		L15-	W-	SN-	A
MODEL NO.		LAMPING	ACRYLIC	FINISH	OPTION(S)
GL-4161	W in 22 7/8" mm 580 H in 11 3/8" mm 290 7 lbs 3.2kg D in 4" mm 100	L10. 1LED30 L15. 1LED35 L14. 1LED40	Standard: W. White Opal Optional: S. Satin White F. Faux Alabaster M. Earth Marble <small>Acrylic is UL-94 HB Flame Class rated.</small>	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone Premium: SA- Satin Aluminum SB- Satin Brass PB- Polished Brass AB- Antique Brass ORB- Oil Rubbed Bronze SC- Satin Chrome SN- Satin Nickel PC- Polished Copper SA- Satin Aluminum	A. No Options EL. Emergency LED <small>Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.</small> L. Perforated Top Lens <small>Painted white perforated metal top lens.</small> TL. Acrylic Top Lens <small>White acrylic top lens.</small>

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Board Lumens	Kelvin
L10	14	+80	50000	1895	3000
L15	14	+80	50000	1895	3500
L14	14	+80	50000	1895	4000

Universal Voltage unless otherwise specified.