

# ILLUSION

## Outdoor LED Sconce



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs are field serviceable.


**LED Dimming:** 1% 0-10V dimming standard. Integral driver.

**Body:** Formed aluminum.

**Finish:** Highly durable oven cured no VOC premium powder coat.  
Face plate painted textured white.

**Surge Protection:** External surge protector provided as standard.

**Listing:** Fixture ETL listed for wet locations.

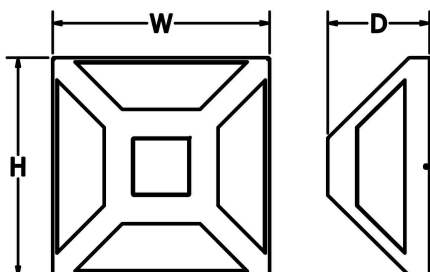

SAMPLE CATALOG NUMBER:

GL-6550-

E5-

NSN

MODEL NO.

LAMPING

FINISH

**GL-6550** W in 12" mm 305  
H in 12" mm 305  
12lbs D in 5 1/2" mm 140  
5.5kg

**E0.** 13LED30  
**E5.** 13LED35  
**E4.** 13LED40  
**G0.** 20LED30  
**G5.** 20LED35  
**G4.** 20LED40

Standard:  
Textured Powder  
**TLV**-Light Verdigris  
**TWH**-Textured White  
**TBL**-Textured Black  
**TS**-Textured Silver  
**TBZ**-Textured Bronze  
**TST**-Stone

**GL-6555** W in 16" mm 405  
H in 16" mm 405  
15lbs D in 7" mm 180  
7kg

All dimensions are nominal.

### Light Source Definition

Code	LED	CRI	Rated Life Hrs	Kelvin	Board Lumens
13LED30	13W LED	+80	50000	3000	1500
13LED35	13W LED	+80	50000	3500	1500
13LED40	13W LED	+80	50000	4000	1500
20LED30	20W LED	+80	50000	3000	2000
20LED35	20W LED	+80	50000	3500	2000
20LED40	20W LED	+80	50000	4000	2000

Universal Voltage unless otherwise specified.