

# JOURNAL

## Interior Schoolhouse Sconce



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs are field serviceable.



**LED Dimming:** 1% 0-10V dimming standard with LED lamping option.

**Body:** 18ga steel or .050 aluminum glass fitter.

**Glass:** White opal diffuser hand blown in the USA.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Surge Protection:** External surge protector provided as standard.

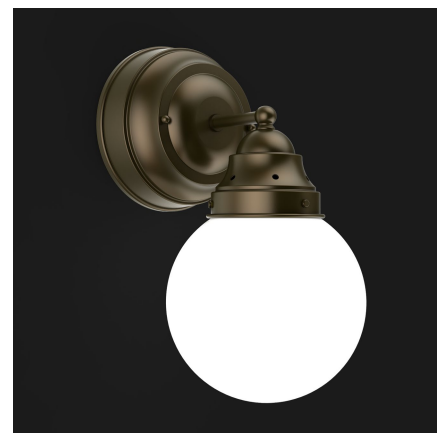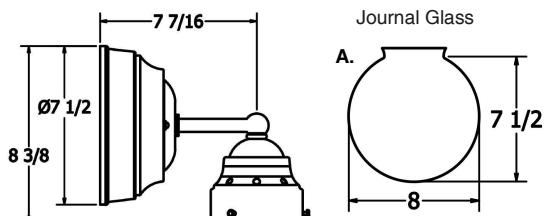

SAMPLE CATALOG NUMBER: GL-4305-				
MODEL NO.	L5-	A-	SN-	A-
MODEL NO.	LAMPING	GLASS	FINISH	OPTION(S)
<b>GL-4305</b>	<b>L0.</b> 11LED30 <b>L5.</b> 11LED35 <b>L4.</b> 11LED40  Driver in backplate	<b>A.</b> Journal Glass	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  <b>Textured Powder</b> <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone  <b>Premium:</b> <b>SA</b> -Satin Aluminum	<b>A.</b> No Options <b>B.</b> Damp Location Available in powder coat or Satin Aluminum finish. <b>EL.</b> Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
<b>GL-4306</b>	<b>IN1.</b> 1MED 120 volt only			

All dimensions are nominal.

### Light Source Definition

Code	LED	Kelvin	Rated Life Hrs	Lumens
11LED30	11W LED	3000	50000	1460
11LED35	11W LED	3500	50000	1460
11LED40	11W LED	4000	50000	1460

Universal Voltage unless otherwise specified.