

KETCH

Indoor ADA Sconce



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs. Integral driver.




LED Dimming: 1% 0-10V dimming standard.

Acrylic: Acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat.

Custom: Contact factory for custom lengths and lamping.

Surge Protection: External surge protector provided as standard.

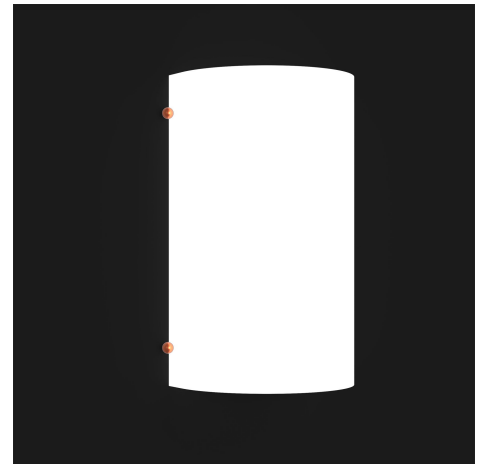

SAMPLE CATALOG NUMBER:

GL-4565-

E5-

W-

NSN-

A

MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)
GL-4565 W in 6 1/2" mm 165 H in 10" mm 255 D in 3 1/2" mm 90	E0. 1LED30 E5. 1LED35 E4. 1LED40	Standard: W. White Opal Optional: S. Satin White F. Faux Alabaster M. Earth Marble Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone	A. No Options B. Top White Perforated Diffuser Top perforated diffuser painted white. C. Bottom White Perforated Diffuser Bottom perforated diffuser painted white. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Board Lumens	Kelvin
1LED30	10W	90	1050	3000
1LED35	10W	90	1050	3500
1LED40	10W	90	1050	4000

Universal Voltage unless otherwise specified.