

PORTLAND

Interior ADA Sconce




9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.
- Diffuser:** Standard perforated white top and bottom diffuser.
- Acrylic:** UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Modifications:** Consult factory for custom lengths or lamping options.
- Surge Protection:** External surge protector provided as standard.

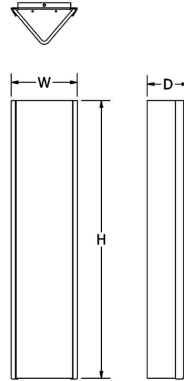

SAMPLE CATALOG NUMBER:					
GL-4630-		B5-	W-	NSN-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)	
GL-4630 W in 5 3/4" mm 145 H in 24" mm 610 7lbs 3.2kg D in 4" mm 100	B0. 2LED30 B5. 2LED35 B4. 2LED40	Standard: W. White Opal Optional: S. Satin White F. Faux Alabaster M. Earth Marble Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.	

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Board Lumens	Kelvin
2LED30	26W	80	3790	3000
2LED35	26W	80	3790	3500
2LED40	26W	80	3790	4000

¹Per GE lamp products catalog

Universal Voltage unless otherwise specified.

