

# SABER 3"

## Indoor Pendant




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** 0-10V dimming standard.
- Driver:** Remote driver standard.
- Cable Hanger:** Comes with 120" powered suspension. Cables are field adjustable.
- Canopies:** Mounted with two canopies on flat or sloped ceilings up to 40°. Canopies match fixture finish.
- Mounting Centers (MC):**
  - GL-2685: 25.75"
  - GL-2686: 37.75"
  - GL-2687: 49.75"
  - GL-2688: 61.75"
- Acrylic:** Satin white seamless outer acrylic is UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Modifications:** Consult factory for lamping or cluster options.
- Surge Protection:** External surge protector provided as standard.

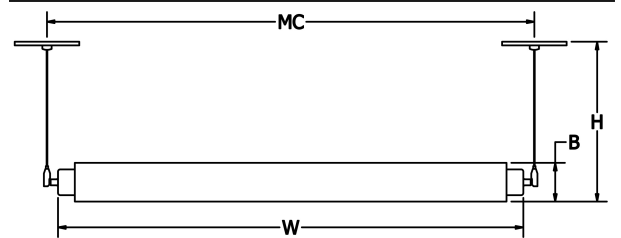

SAMPLE CATALOG NUMBER:						
GL-2685-		B-	S-	WH-	1-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	
<b>GL-2685</b> W in 24" mm 650 B in 3" mm 75 6lbs H in 120" mm 1830 2.7kg MC in 25 3/4" mm 655	<b>A.</b> 26LED30 <b>B.</b> 26LED35 <b>C.</b> 26LED40	Standard: <b>S</b> Satin White  Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone  Premium: <b>SA</b> -Satin Aluminum	<b>1. Cable</b>  Powered suspension with remote driver.	<b>A. No Options</b> <b>EL. Emergency LED</b> Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.  <b>LPS. 180" Powered Suspension</b> Fixture supplied with 180" cables.	
<b>GL-2686</b> W in 36" mm 955 B in 3" mm 75 7lbs H in 120" mm 1830 3.2kg MC in 37 3/4" mm 960	<b>D.</b> 38LED30 <b>E.</b> 38LED35 <b>F.</b> 38LED40					
<b>GL-2687</b> W in 48" mm 1260 B in 3" mm 75 8lbs H in 120" mm 1830 3.6kg MC in 49 3/4" mm 1265	<b>G.</b> 50LED30 <b>H.</b> 50LED35 <b>I.</b> 50LED40					
<b>GL-2688</b> W in 60" mm 1565 B in 3" mm 75 10lbs H in 120" mm 1830 4.5kg MC in 61 3/4" mm 1570	<b>J.</b> 62LED30 <b>K.</b> 62LED35 <b>L.</b> 62LED40			<b>2. Oversized with Cable</b>  Powered suspension with integral driver.	Hanger option 1 supplied with remote driver box.	

Fixtures over 50 lbs require reinforced junction box  
All dimensions are nominal.

### Light Source Definition

Code	Lamp	Total Wattage	Delivered Lumens	Kelvin	Code	Lamp	Total Wattage	Delivered Lumens	Kelvin
A	26LED30	33W	2649	3000	G	50LED30	68W	6241	3000
B	26LED35	33W	2649	3500	H	50LED35	68W	6241	3500
C	26LED40	33W	2649	4000	I	50LED40	68W	6241	4000
D	38LED30	52W	4434	3000	J	62LED30	82W	7712	3000
E	38LED35	52W	4434	3500	K	62LED35	82W	7712	3500
F	38LED40	52W	4434	4000	L	62LED40	82W	7712	4000

Universal Voltage unless otherwise specified.

