

SEATTLE

Interior ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.



LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request. Driver mounted in 4" square by 2 1/8" deep junction box: Steel City #52171 or equivalent (supplied by others)

Diffuser: Standard perforated white top and bottom diffuser.

Acrylic: UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat.

Modifications: Consult factory for custom lengths or lamping options.

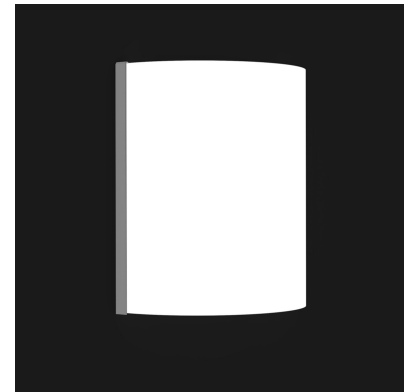

SAMPLE CATALOG NUMBER:				
GL-4633-	G5-	W-	NSN-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)
GL-4633 W 9 3/4" in 250 mm H 1 1/16" in 280 mm 5lbs D 4" in 100 mm 2.3kg	G0. 1LED30 G5. 1LED35 G4. 1LED40	Standard: W. White Opal Optional: S. Satin White F. Faux Alabaster M. Earth Marble Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone	A. No Options EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.

All dimensions are nominal.

Light Source Definition

Code	LED	CRI	Rated Life Hrs	Kelvin	Board Lumens
1LED30	11W LED	+80	50000	3000	1895
1LED35	11W LED	+80	50000	3500	1895
1LED40	11W LED	+80	50000	4000	1895

Universal Voltage unless otherwise specified.