

# SIDNEY 6" LED

## Interior Pendant





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.
- Down Light:** 90CRI 17 watt 2000 lumen module. Lamping code ending with "DL" includes downlight.
- Acrylic:** Seamless acrylic is UL-94 HB Flame Class rated.
- Canopy:** Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord and cable.
- Cable Hanger Option:** Supplied with standard 72" white cord and cable. Field adjustable.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Modifications:** Consult factory for lamping or cluster options.
- Surge Protection:** External surge protector provided as standard.

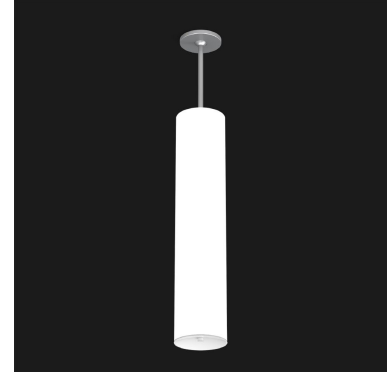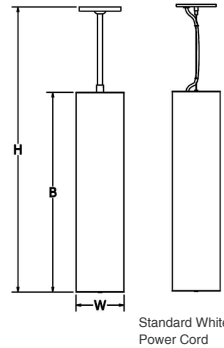

SAMPLE CATALOG NUMBER:						
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT
<b>GL-2675</b> Win 6" mm 150 B in 28 1/8" mm 715 15lbs H in 38" mm 965 7kg Fixture does not include downlight	<b>G.</b> 4LED30 <b>H.</b> 4LED35 <b>I.</b> 4LED40	<b>Standard:</b> <b>W</b> White Opal <b>S</b> Satin White  Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  <b>Textured Powder</b> <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone  <b>Premium:</b> <b>SA</b> -Satin Aluminum	<b>1. Stem</b>  Remote driver.  <b>2. Cable</b>  Standard white power cord. Remote driver.  <b>3. Oversized with Stem</b>  12" Canopy  <b>4. Oversized with Cable</b>  Standard white power cord. 12" Canopy.	<b>A.</b> No Options <b>BC.</b> Black Cord Fixture supplied with black power cord. <b>LC.</b> 150" Cord & Cable Fixture supplied with 150" of cable and standard white cord or optional black cord. <b>EL.</b> Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.	Stem mount only - Specify overall height in inches.  Standard overall height shown by model no.
<b>GL-2676</b> Win 6" mm 150 B in 33 5/8" mm 855 17lbs H in 44" mm 1120 7.7kg Fixture includes downlight	<b>J.</b> 4LED30DL <b>K.</b> 4LED35DL <b>L.</b> 4LED40DL					
<b>GL-2677</b> Win 6" mm 150 B in 51 7/8" mm 1320 25lbs H in 62" mm 1575 11.3kg Fixture does not include downlight	<b>M.</b> 4LED30 <b>N.</b> 4LED35 <b>O.</b> 4LED40					
<b>GL-2678</b> Win 6" mm 150 B in 57 1/8" mm 1450 27lbs H in 67" mm 1700 12.25kg Fixture includes downlight	<b>P.</b> 4LED30DL <b>Q.</b> 4LED35DL <b>R.</b> 4LED40DL					

Fixtures over 50 lbs require reinforced junction box  
All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin	Code	*Total Wattage	*Delivered Lumens	Kelvin
G	37W	4601	3000	J	54W	6293	3000
H	37W	4601	3500	K	54W	6293	3500
I	37W	4601	4000	L	54W	6293	4000
M	76W	9053	3000	P	93W	10745	3000
N	76W	9053	3500	Q	93W	10745	3500
O	76W	9053	4000	R	93W	10745	4000

Universal Voltage unless otherwise specified.

\*Includes downlight wattage (17W) and lumen output (1692lm)

