

SQUARE BEAM RGB+W

Exterior Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

RGB+White: LED lamping options (RGB30, RGB35, & RGB40) feature RGB color changing plus a full power white channel. DMX controller supplied by others.

RGB: LED lamping option features RGB color changing. DMX controller supplied by others.

Static Color: LED options (Red, Green, or Blue) feature static color.

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: Standard 0-10V dimming when static color specified.

LED Driver: Driver remotely mounted up to 10' from fixture body.

Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.


Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Design: Aluminum die cast end caps and decorative bars.

Modified: Contact factory for modified lengths, lamping and decorative fronts.

Exterior Mounting: Gasketed between wall and wall plate.

Listing: Fixture ETL listed for wet locations.

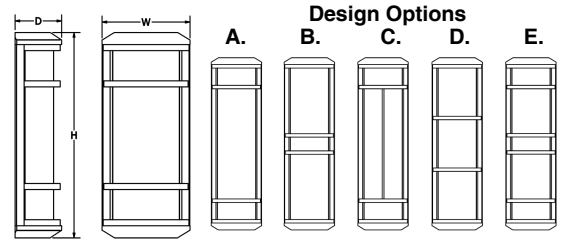

SAMPLE CATALOG NUMBER:						
GL-5471-		MM-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)	
GL-5470 W 7 1/4" in H 17" in 5lbs 2.3kg D 3 7/8" in	Y. RED Z. GREEN AA. BLUE BB. RGB CC. 14RGB30 DD. 14RGB35 EE. 14RGB40	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue	Standard: A. Optional: B. C. D. E. Not available with GL-5470	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	
GL-5471 W 7 1/4" in H 25" in 7lbs 3.2kg D 3 7/8" in	FF. RED GG. GREEN HH. BLUE II. RGB JJ. 14RGB30 KK. 14RGB35 LL. 14RGB40 MM. 28RGB30 NN. 28RGB35 OO. 28RGB40					
GL-5472 W 7 1/4" in H 37" in 10lbs 4.5kg D 3 7/8" in	PP. RED QQ. GREEN RR. BLUE SS. RGB TT. 21RGB30 UU. 21RGB35 VV. 21RGB40 WW. 42RGB30 XX. 42RGB35 YY. 42RGB40					
GL-5473 W 7 1/4" in H 49" in 14lbs 6.3kg D 3 7/8" in	ZZ. RED AB. GREEN AC. BLUE AD. RGB AE. 28RGB30 AF. 28RGB35 AG. 28RGB40 AH. 56RGB30 AI. 56RGB35 AJ. 56RGB40		Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone Premium: SA- Satin Aluminum			

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
14RGB30	14W	+80	50000	781	3000	28RGB30	28W	+80	50000	1562	3000
14RGB35	14W	+80	50000	781	3500	28RGB35	28W	+80	50000	1562	3500
14RGB40	14W	+80	50000	781	4000	28RGB40	28W	+80	50000	1562	4000
21RGB30	21W	+80	50000	1171	3000	42RGB30	42W	+80	50000	2527	3000
21RGB35	21W	+80	50000	1171	3500	42RGB35	42W	+80	50000	2527	3500
21RGB40	21W	+80	50000	1171	4000	42RGB40	42W	+80	50000	2527	4000
						56RGB30	56W	+80	50000	3124	3000
						56RGB35	56W	+80	50000	3124	3500
						56RGB40	56W	+80	50000	3124	4000

Universal Voltage unless otherwise specified.

