

# SQUARE BEAM with LED SPOT

## Exterior Sconce

9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED Up/Down Light:** Non-dimming 3.6W 225 lumen LED spot.

**LED Reflector:** 40° and 60° reflectors available.

**LED:** High efficiency mid-power LEDs are field serviceable.

**LED Dimming:** 0-10V dimming standard.

**Body:** Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

**Diffuser:** Extruded polycarbonate lens is UL-94 HB Flame Class rated.


**Standard Finishes:** Highly durable oven cured no VOC premium powder coat.

**Design:** Aluminum die cast end caps and decorative bars.

**Modified:** Contact factory for modified lengths, lamping and decorative fronts.

**Exterior Mounting:** Gasketed between wall and wall plate.

**Listing:** Fixture ETL listed for wet locations.

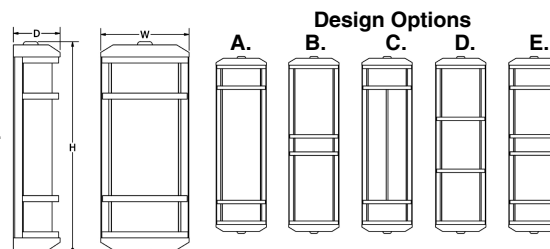

SAMPLE CATALOG NUMBER:						
GL-5481-	G-	C-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIRECTION	DIFFUSER	FINISH	DESIGN	OPTION(S)
<b>GL-5480</b> W 7 1/4" in H 17 1/2" in 5lbs D 3 7/8" in 2.3kg	<b>A.</b> 14LED30 <b>C.</b> 14LED40	<b>A.</b> 40° Uplight & No Downlight <b>B.</b> 60° Uplight & No Downlight <b>C.</b> 40° Downlight & No Uplight	<b>Standard:</b> <b>S.</b> Satin White  Polycarbonate is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone  <b>Premium:</b> <b>SA</b> -Satin Aluminum	<b>Standard:</b> <b>A.</b>  <b>Optional:</b> <b>B.</b> <b>C.</b> <b>D.</b> <b>E.</b> Not available with GL-5480	<b>A.</b> No Options <b>EL.</b> Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
<b>GL-5481</b> W 7 1/4" in H 27 1/2" in 7lbs D 3 7/8" in 3.2kg	<b>D.</b> 14LED30 <b>F.</b> 14LED40 <b>G.</b> 28LED30 <b>I.</b> 28LED40	<b>D.</b> 60° Downlight & No Uplight <b>E.</b> 40° Up & Down <b>F.</b> 60° Up & Down <b>G.</b> 40° Up 60° Down <b>H.</b> 60° Up 40° Down				
<b>GL-5482</b> W 7 1/4" in H 39 1/2" in 10lbs D 3 7/8" in 4.5kg	<b>K.</b> 21LED30 <b>M.</b> 21LED40 <b>N.</b> 42LED30 <b>P.</b> 42LED40					
<b>GL-5483</b> W 7 1/4" in H 51 1/2" in 14lbs D 3 7/8" in 6.3kg	<b>R.</b> 28LED30 <b>T.</b> 28LED40 <b>U.</b> 56LED30 <b>W.</b> 56LED40					

All dimensions are nominal.

### Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Spot LED	Reflector	CRI	Lumens	Kelvin
14LED30	14W	80	50000	1333	3000	3.6W	40°	80	225	3000 & 4000
14LED40	14W	80	50000	1333	4000	3.6W	60°	80	225	3000 & 4000
21LED30	21W	80	50000	2095	3000					
21LED40	21W	80	50000	2095	4000					
28LED30	28W	80	50000	2690	3000					
28LED40	28W	80	50000	2690	4000					
42LED30	42W	80	50000	4191	3000					
42LED40	42W	80	50000	4191	4000					
56LED30	56W	80	50000	5764	3000					
56LED40	56W	80	50000	5764	4000					

Universal Voltage unless otherwise specified.