

SQUARE BEAM with LED SPOT



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

Exterior Sconce - RGBW

sales@lighting.com www.lighting.com

GENERAL SPECIFICATION

LED Up/Down Light: Non-dimming static white 3.6W 225 lumen LED spot.

LED Reflector: 40° and 60° reflectors available.

RGB+White: LED lamping options (RGB30 & RGB40) feature RGB color changing plus a full power white channel. DMX controller supplied by others.

RGB: LED lamping option features RGB color changing. DMX controller supplied by others.

Static Color: LED options (Red, Green, or Blue) feature static color.

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: Standard 0-10V dimming when static color specified.

LED Driver: Driver remotely mounted up to 10' from fixture body.

Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.


Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Design: Aluminum die cast end caps and decorative bars.

Exterior Mounting: Gasketed between wall and wall plate.

Listing: Fixture ETL listed for wet locations.

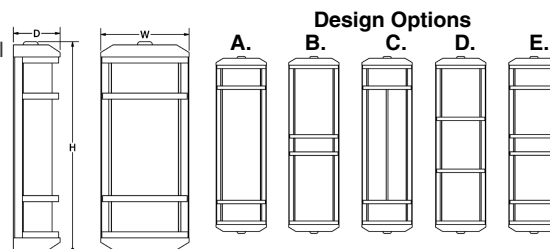

SAMPLE CATALOG NUMBER:							
GL-5481-		G-	C-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIRECTION	DIFFUSER	FINISH	DESIGN	OPTION(S)	
GL-5480 W 7 1/4" in H 17 1/2" in 5lbs D 3 7/8" in 2.3kg	Y. RED Z. GREEN AA. BLUE BB. RGB CC. 14RGB30 EE. 14RGB40	A. 40° Uplight & No Downlight B. 60° Uplight & No Downlight C. 40° Downlight & No Uplight	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone Premium: SA- Satin Aluminum	Standard: A. Optional: B. C. D. E. Not available with GL-5480	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	
GL-5481 W 7 1/4" in H 27 1/2" in 7lbs D 3 7/8" in 3.2kg	FF. RED GG. GREEN HH. BLUE II. RGB JJ. 14RGB30 LL. 14RGB40 MM. 28RGB30 OO. 28RGB40	D. 60° Downlight & No Uplight E. 40° Up & Down F. 60° Up & Down G. 40° Up 60° Down H. 60° Up 40° Down					
GL-5482 W 7 1/4" in H 39 1/2" in 10lbs D 3 7/8" in 4.5kg	PP. RED QQ. GREEN RR. BLUE SS. RGB TT. 21RGB30 VV. 21RGB40 WW. 42RGB30 YY. 42RGB40						
GL-5483 W 7 1/4" in H 51 1/2" in 14lbs D 3 7/8" in 6.3kg	ZZ. RED AB. GREEN AC. BLUE AD. RGB AE. 28RGB30 AG. 28RGB40 AH. 56RGB30 AJ. 56RGB40						

All dimensions are nominal.

Light Source Definition

Code	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Spot LED	Reflector	CRI	Lumens	Kelvin
14RGB30	14W	+80	50000	781	3000	3.6W	40°	80	225	3000 & 4000
14RGB40	14W	+80	50000	781	4000	3.6W	60°	80	225	3000 & 4000
21RGB30	21W	+80	50000	1171	3000					
21RGB40	21W	+80	50000	1171	4000					
28RGB30	28W	+80	50000	1562	3000					
28RGB40	28W	+80	50000	1562	4000					
42RGB30	42W	+80	50000	2527	3000					
42RGB40	42W	+80	50000	2527	4000					
56RGB30	56W	+80	50000	3124	3000					
56RGB40	56W	+80	50000	3124	4000					

Universal Voltage unless otherwise specified.