

SQUARE BEAM RGB+W

ADA Interior Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

RGB+White: LED lamping options (RGB30, RGB35, & RGB40) feature RGB color changing plus a full power white channel. DMX controller supplied by others.

RGB: LED lamping option features RGB color changing. DMX controller supplied by others. Static Color: LED options (Red, Green, or Blue) feature static color.

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: Standard 0-10V dimming when static color specified.

LED Driver: Driver remotely mounted up to 10' from fixture body.


Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Design: Aluminum die cast end caps and decorative bars.

Modified: Contact factory for modified lengths, lamping and decorative fronts.

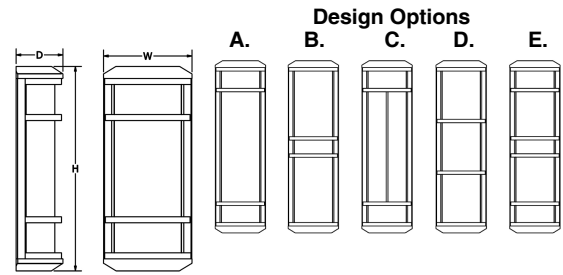

SAMPLE CATALOG NUMBER:		H-	S-	PA-	A-	A
GL-4471-						
MODEL NO.		LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)
GL-4470	W in 7 1/4" mm 185	Y. RED	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue	Standard: A. Optional: B. C. D. E. Not available with GL-4470	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
	5lbs 2.3kg	H in 17" mm 430 D in 3 7/8" mm 125				
GL-4471	W in 7 1/4" mm 185	FF. RED		Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone		
	7lbs 3.2kg	H in 25" mm 635 D in 3 7/8" mm 125				
GL-4472	W in 7 1/4" mm 185	PP. RED		Premium: SA- Satin Aluminum		
	10lbs 4.5kg	H in 37" mm 940 D in 3 7/8" mm 125				
GL-4473	W in 7 1/4" mm 185	ZZ. RED				
	14lbs 6.3kg	H in 49" mm 1245 D in 3 7/8" mm 125				

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
14RGB30	14W	+80	50000	781	3000	28RGB30	28W	+80	50000	1562	3000
14RGB35	14W	+80	50000	781	3500	28RGB35	28W	+80	50000	1562	3500
14RGB40	14W	+80	50000	781	4000	28RGB40	28W	+80	50000	1562	4000
21RGB30	21W	+80	50000	1171	3000	42RGB30	42W	+80	50000	2527	3000
21RGB35	21W	+80	50000	1171	3500	42RGB35	42W	+80	50000	2527	3500
21RGB40	21W	+80	50000	1171	4000	42RGB40	42W	+80	50000	2527	4000
Universal Voltage unless otherwise specified.						56RGB30	56W	+80	50000	3124	3000
						56RGB35	56W	+80	50000	3124	3500
						56RGB40	56W	+80	50000	3124	4000

